
Option A / no-chair-rail comparison

Upper + lower frames / no chair rail

OPTION A / NO RAIL - CHAIR RAIL UNDECIDED - REVIEW ONLY / DO NOT CUT

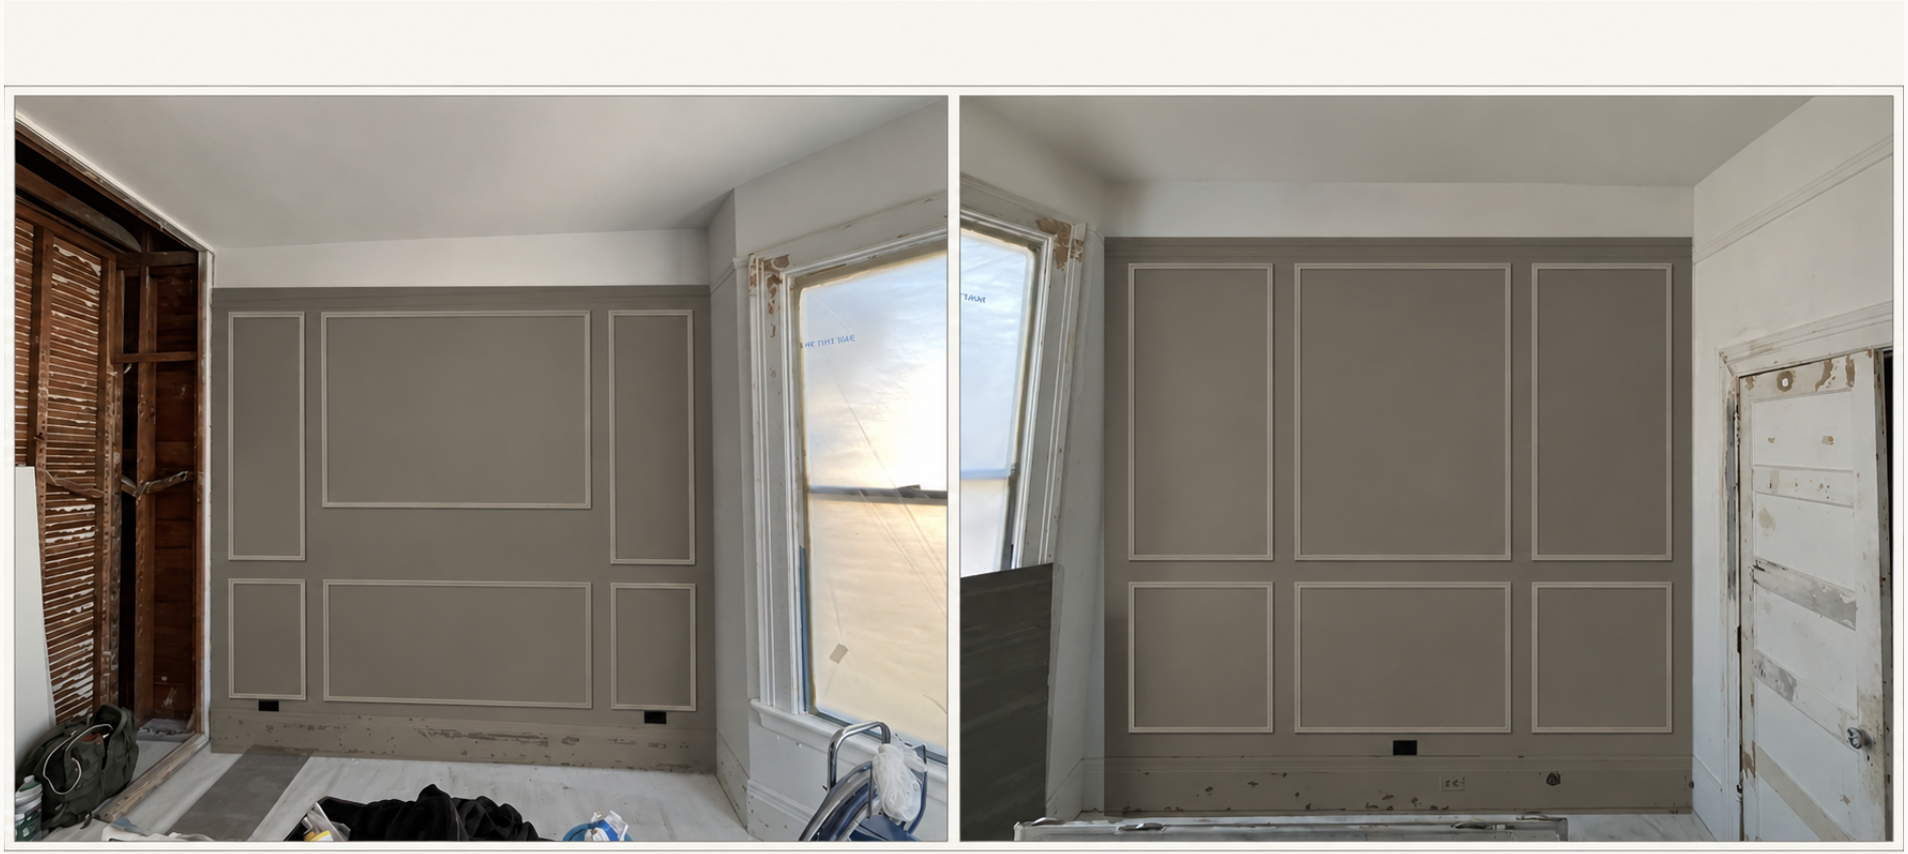


Chair rail remains UNDECIDED. Option A shows upper/lower frames without rail; the existing chair-rail design remains Option B for comparison. Original trim stays.

Photo mockup is illustrative. Color/profile are unselected. Dimensioned review sheets and source schedule control this review, not image pixels.

Proportion, retained trim and setting out

Upper + lower frames / no chair rail

OPTION A / NO RAIL - CHAIR RAIL UNDECIDED - REVIEW ONLY / DO NOT CUT

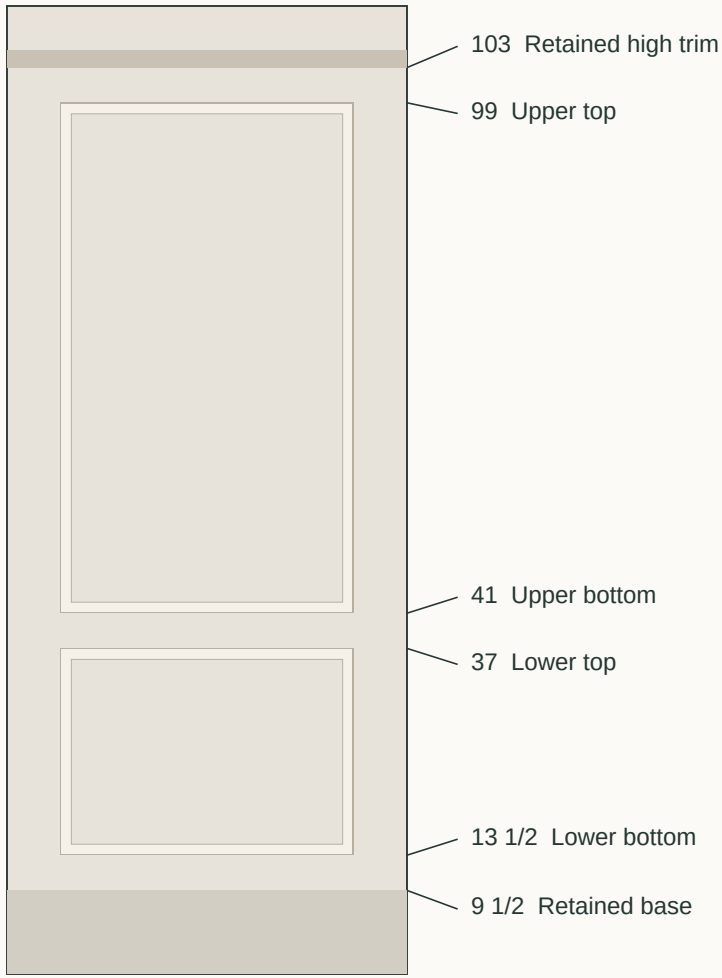

4 + 23 1/2 + 4 + 58 + 4 = 93 1/2

Clear field:103 - 9 1/2 =93 1/2 in

A closed frame, not a horizontal divider. The former rail band is absorbed into taller lower rectangles. Keep a deliberate 4-in reveal between the rows.

This nominal height stack reuses source datums. Actual base/high trim governs alignment, including its existing slope. Do not force a new laser-level line.

Outside dimensions define the frame perimeter. A 1 1/4-in face is only a drawing parameter. If selected, clear opening = outside dimension minus 2 1/2.


Bedroom A centre stays raised for the headboard; fireplace centre stays above the mantel. These are explicit exceptions, not missing lower/upper rows.

Lay out from each wall centreline. Show full-size tape outline before final cuts. Finished-floor datum is nominal; unknown finish build-up is not converted to subfloor marks.

Bedroom A / north headboard

Upper + lower frames / no chair rail

OPTION A / NO RAIL - CHAIR RAIL UNDECIDED - REVIEW ONLY / DO NOT CUT

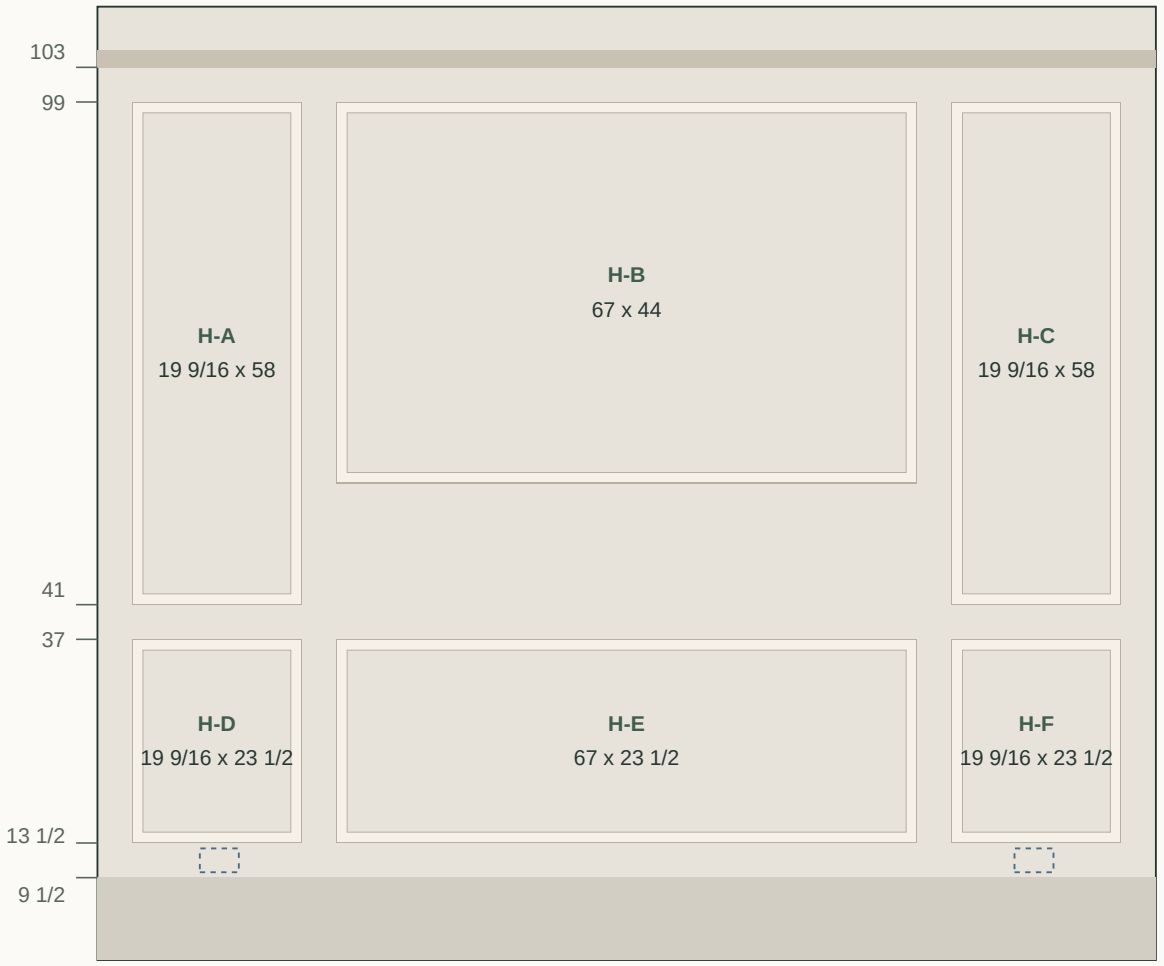

Proportional diagram - use written dimensions; not field setout.

SOURCE / OPEN ITEMS

Niche opening to bay corner: 122 1/8 in, recorded in R2 from Magicplan. Earlier 124-in run has unresolved endpoints.

Proposed 4-in ends and gaps: sides become 19 9/16; centre stays 67. Central upper stays 55-99 for the headboard.

Existing outlet proposal remains CL +/-47 in. Side-frame centre differs by 9/32 in; do not move an outlet to match this sketch.


Nominal vertical basis: base top 9 1/2; high-trim underside 103. Follow retained trim; floor build-up unknown. Subfloor marks are not supplied.

Outside frame dimensions / inches. Face 1 1/4 shown for comparison only; profile and finish unselected.

Bedroom C / south shared wall

Upper + lower frames / no chair rail

OPTION A / NO RAIL - CHAIR RAIL UNDECIDED - REVIEW ONLY / DO NOT CUT

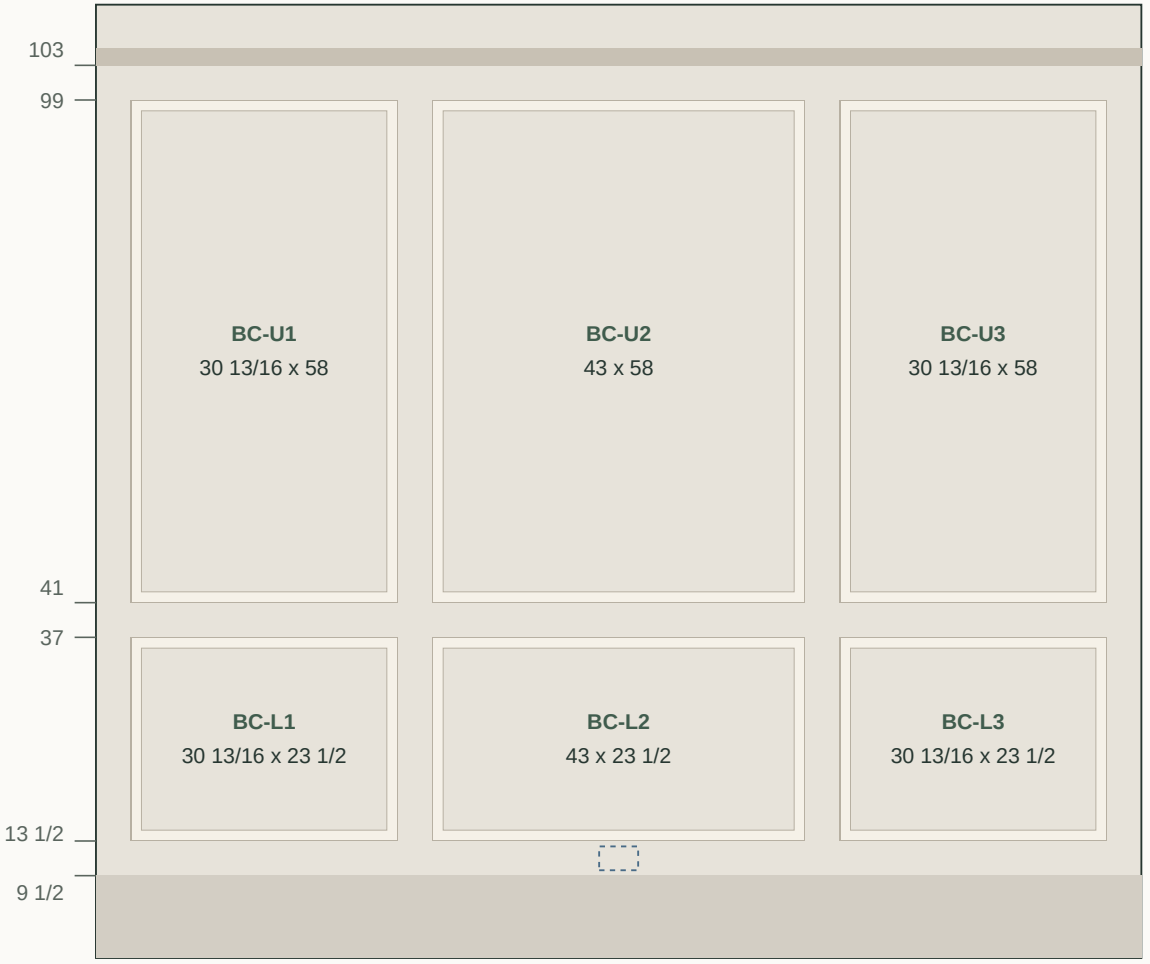

Proportional diagram - use written dimensions; not field setout.

SOURCE / OPEN ITEMS

Bay corner to entry corner: 120 5/8 in, R2 plan-recorded. Earlier 121-in field report needs endpoint reconciliation.

Proposed 4-in ends and gaps: sides become 30 13/16; centre stays 43. Six frames; centreline-first layout.

This is current Wall C, formerly called Wall B. Wall B is the east bay wall and receives no applied frames.


Nominal vertical basis: base top 9 1/2; high-trim underside 103. Follow retained trim; floor build-up unknown. Subfloor marks are not supplied.

Outside frame dimensions / inches. Face 1 1/4 shown for comparison only; profile and finish unselected.

Living L01 / three-bay wall

Upper + lower frames / no chair rail

OPTION A / NO RAIL - CHAIR RAIL UNDECIDED - REVIEW ONLY / DO NOT CUT

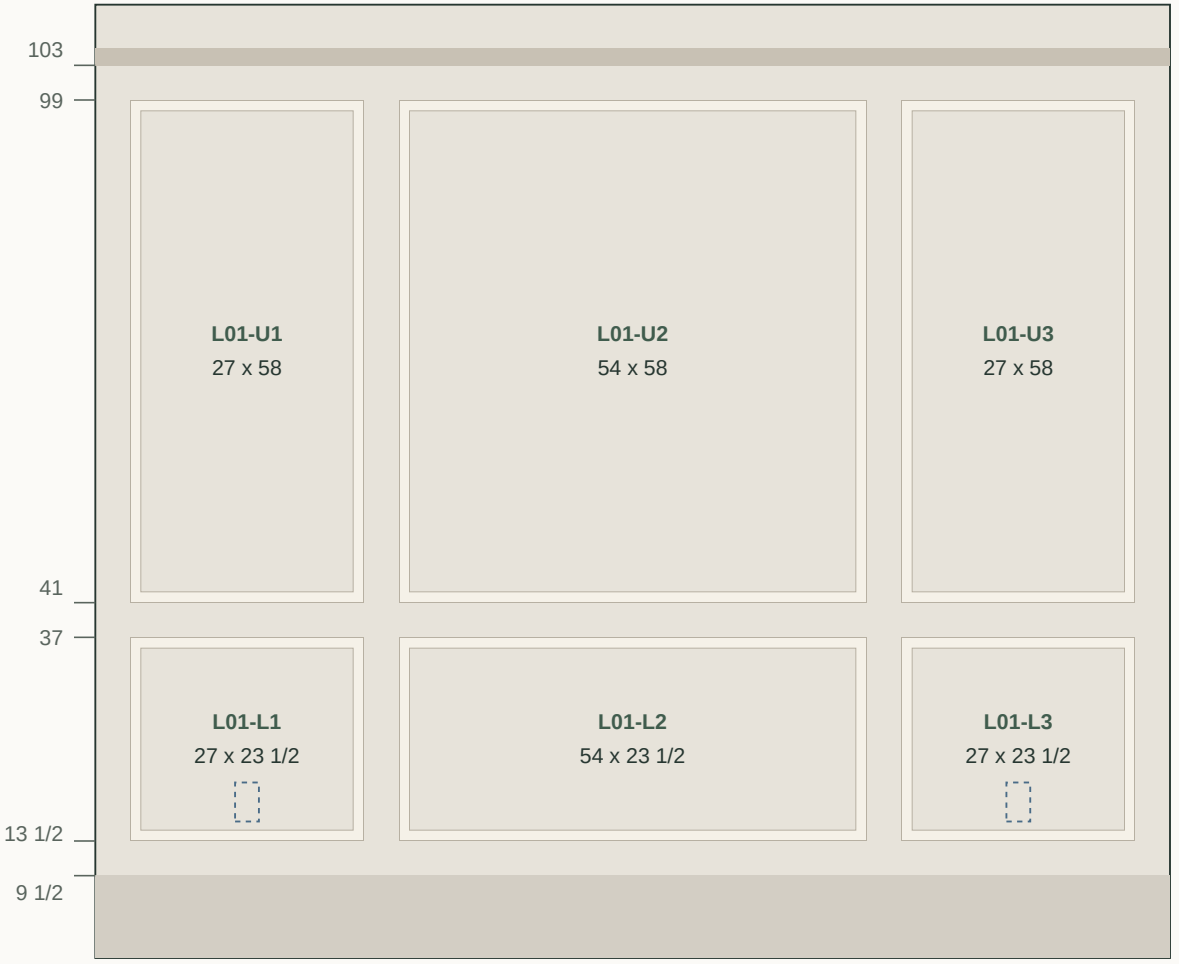

Proportional diagram - use written dimensions; not field setout.

SOURCE / OPEN ITEMS

124-in run is a recovered measured-source annotation. Tisa reports field verification; the original annotated face/endpoints remain to be matched.

Retain the 27 / 54 / 27 rhythm. Lower frames grow from 17 1/2 to 23 1/2 in high.

Existing device marks are source proposals, not verified installed locations.


Nominal vertical basis: base top 9 1/2; high-trim underside 103. Follow retained trim; floor build-up unknown. Subfloor marks are not supplied.

Outside frame dimensions / inches. Face 1 1/4 shown for comparison only; profile and finish unselected.

Living L02 / pocket-door face

Upper + lower frames / no chair rail

OPTION A / NO RAIL - CHAIR RAIL UNDECIDED - REVIEW ONLY / DO NOT CUT

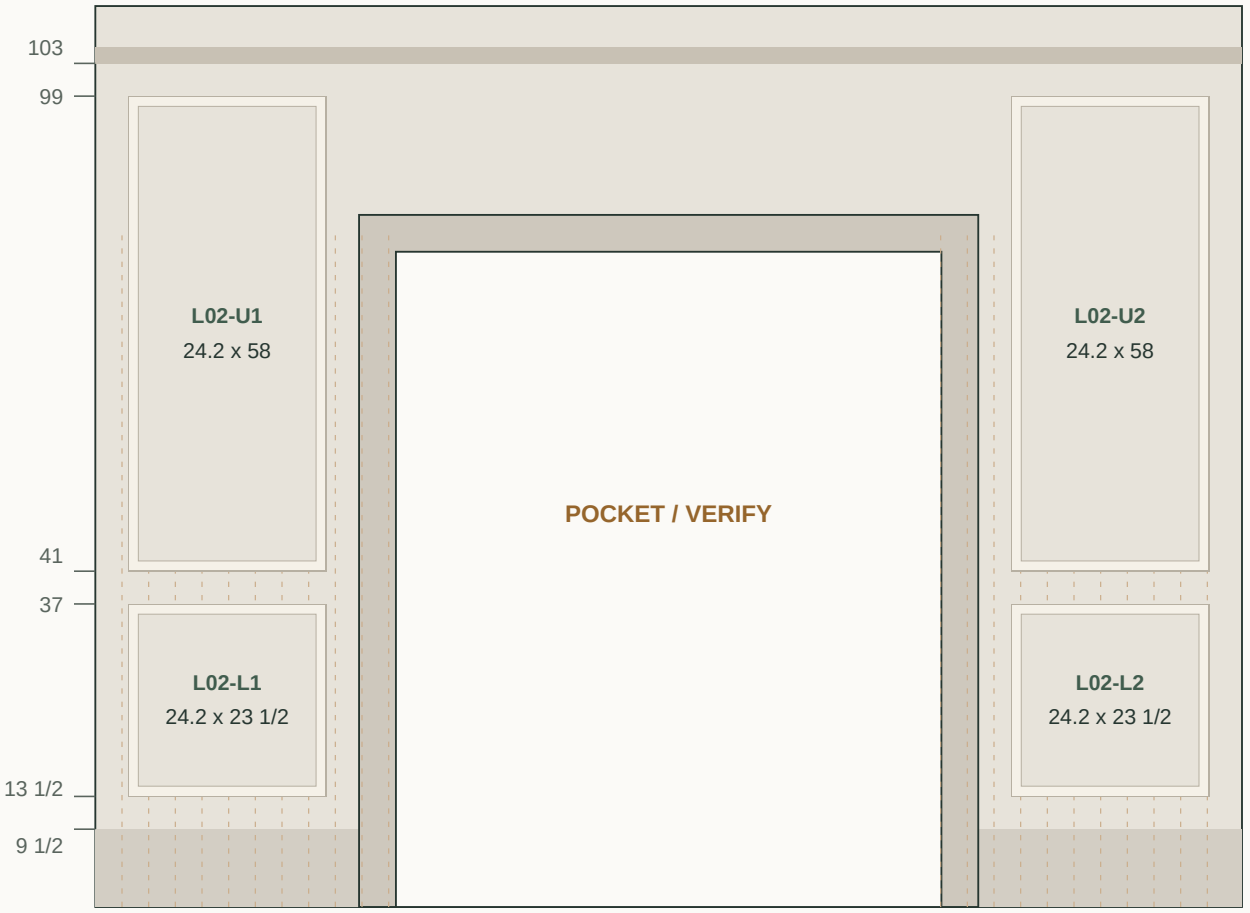

Proportional diagram - use written dimensions; not field setout.

SOURCE / OPEN ITEMS

Illustration only: 140-in overall, two independent 32.2-in piers and 75.6-in cased opening. Do not use these as field cuts.

One aligned upper/lower pair per eligible pier. No rail or rail returns at casing.

Pocket cavities overlap frame areas. Actual backing and safe fixing depth are unknown; no fastener locations authorized.


Nominal vertical basis: base top 9 1/2; high-trim underside 103. Follow retained trim; floor build-up unknown. Subfloor marks are not supplied.

Outside frame dimensions / inches. Face 1 1/4 shown for comparison only; profile and finish unselected.

Living L03 / fireplace wall

Upper + lower frames / no chair rail

OPTION A / NO RAIL - CHAIR RAIL UNDECIDED - REVIEW ONLY / DO NOT CUT

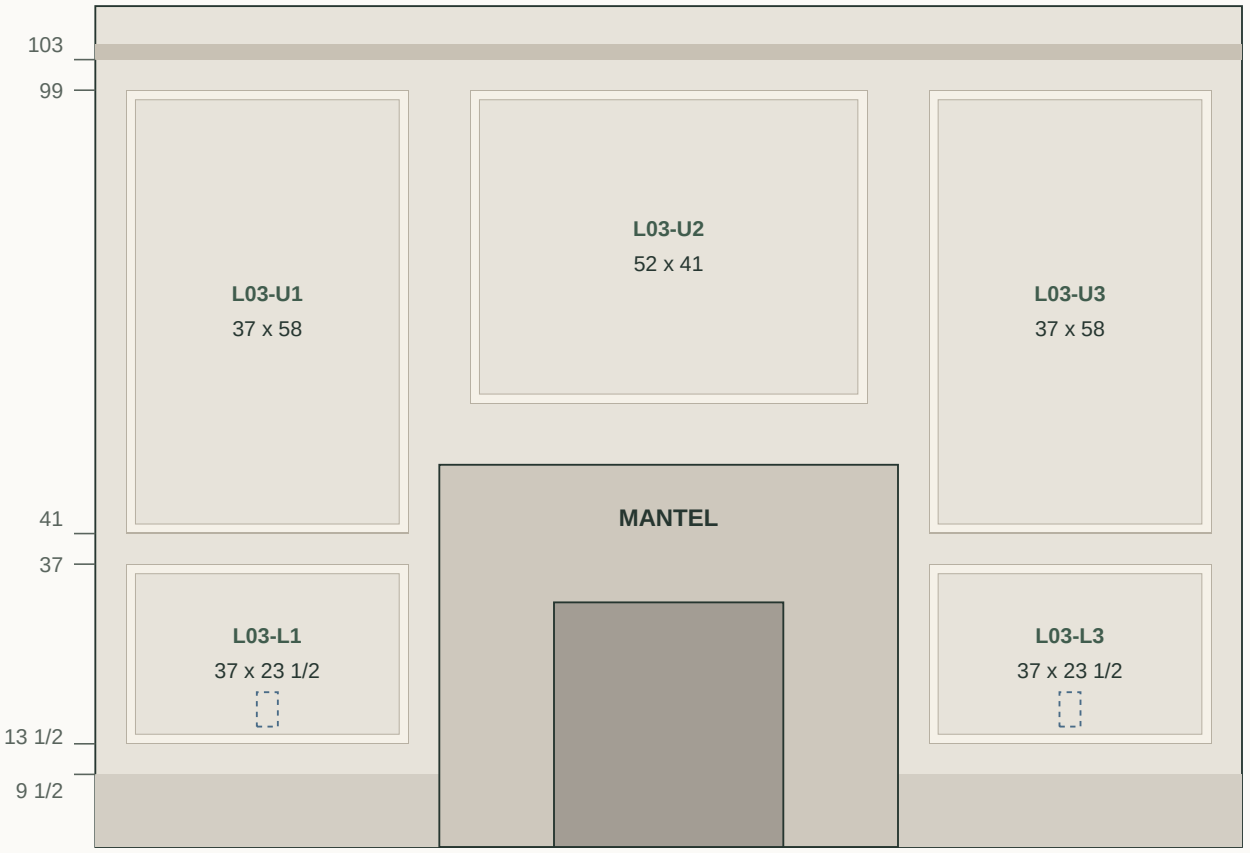

Left edges from source x=0: 4 / 49 / 109

SOURCE RUN 150 in

Proportional diagram - use written dimensions; not field setout.

SOURCE / OPEN ITEMS

Illustration: 150-in wall, 60-in mantel zone. Measure the two side fields independently.

Side pairs retain 37-in widths; centre upper retains 52 x 41, at 58-99. No frame across fireplace opening.

Mantel size, heat/clearance requirements and device positions remain to be coordinated; this sheet does not approve combustible trim clearance.


Nominal vertical basis: base top 9 1/2; high-trim underside 103. Follow retained trim; floor build-up unknown. Subfloor marks are not supplied.

Outside frame dimensions / inches. Face 1 1/4 shown for comparison only; profile and finish unselected.

Dining D01 / two bays

Upper + lower frames / no chair rail

OPTION A / NO RAIL - CHAIR RAIL UNDECIDED - REVIEW ONLY / DO NOT CUT

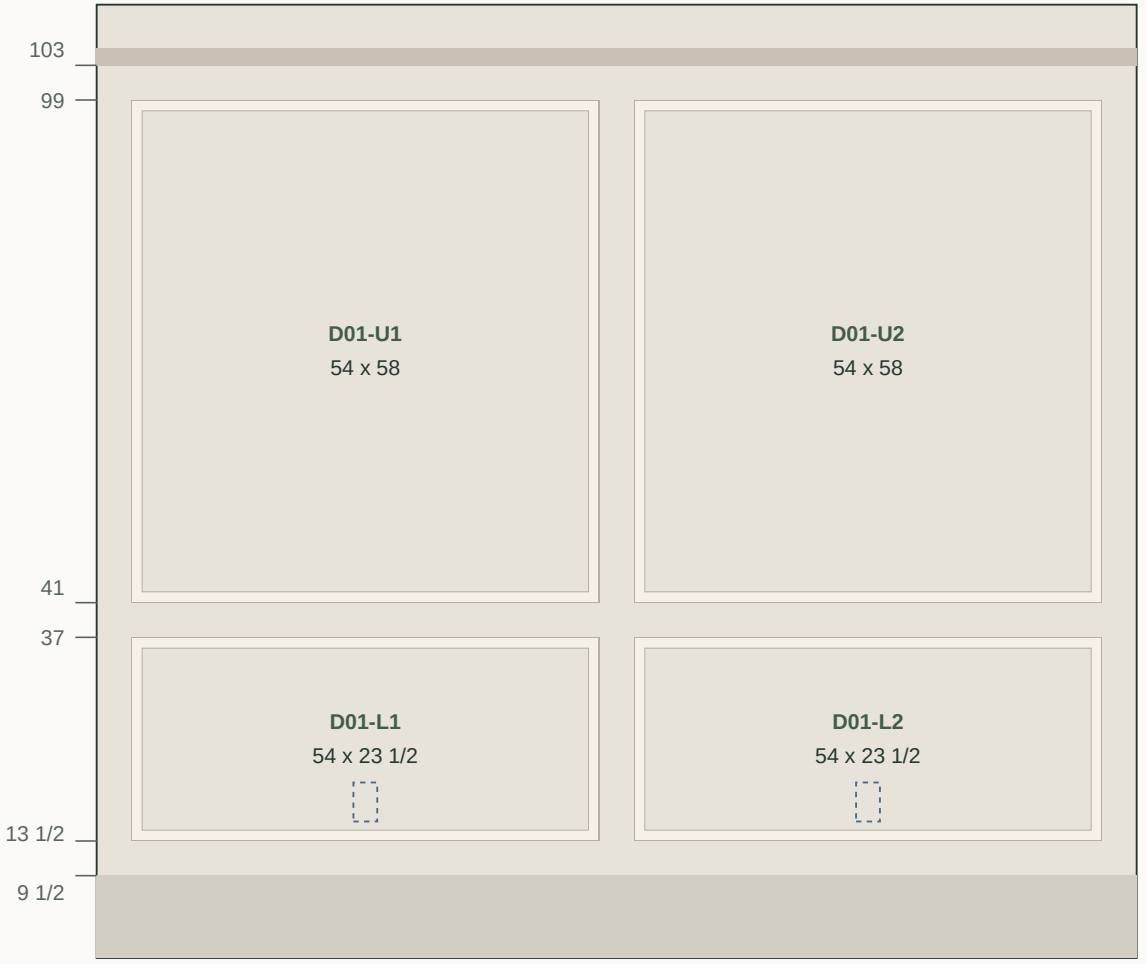

Proportional diagram - use written dimensions; not field setout.

SOURCE / OPEN ITEMS

W=120 in is an illustration, not a recovered clear-run measurement. Formula per bay: (W-12)/2.

Two equal upper/lower pairs. Check actual casing-to-corner endpoints before replacing the illustrated widths.

Current outlet-height/location review remains separate. No relocation is implied.


Nominal vertical basis: base top 9 1/2; high-trim underside 103. Follow retained trim; floor build-up unknown. Subfloor marks are not supplied.

Outside frame dimensions / inches. Face 1 1/4 shown for comparison only; profile and finish unselected.

Dining D02 / movable buffet

Upper + lower frames / no chair rail

OPTION A / NO RAIL - CHAIR RAIL UNDECIDED - REVIEW ONLY / DO NOT CUT

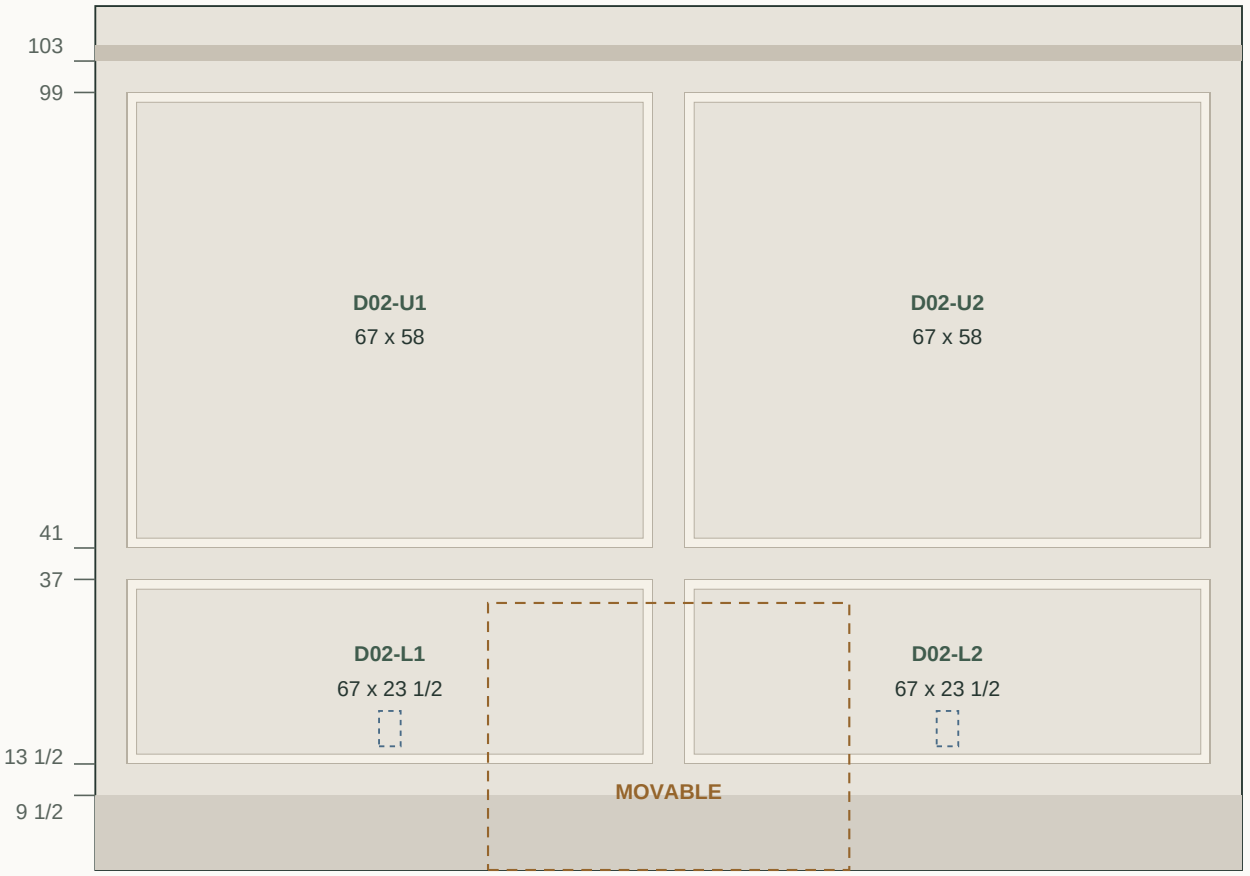

Proportional diagram - use written dimensions; not field setout.

SOURCE / OPEN ITEMS

W=146 in is illustrative. Buffet is movable furniture, not a built-in boundary.

Keep two equal pairs across the wall, including behind the movable buffet. Do not revive the old five-frame scheme.

Actual clear-run width, buffet footprint and device covers need coordination.


Nominal vertical basis: base top 9 1/2; high-trim underside 103. Follow retained trim; floor build-up unknown. Subfloor marks are not supplied.

Outside frame dimensions / inches. Face 1 1/4 shown for comparison only; profile and finish unselected.

Dining D03 / pocket-door face

Upper + lower frames / no chair rail

OPTION A / NO RAIL - CHAIR RAIL UNDECIDED - REVIEW ONLY / DO NOT CUT

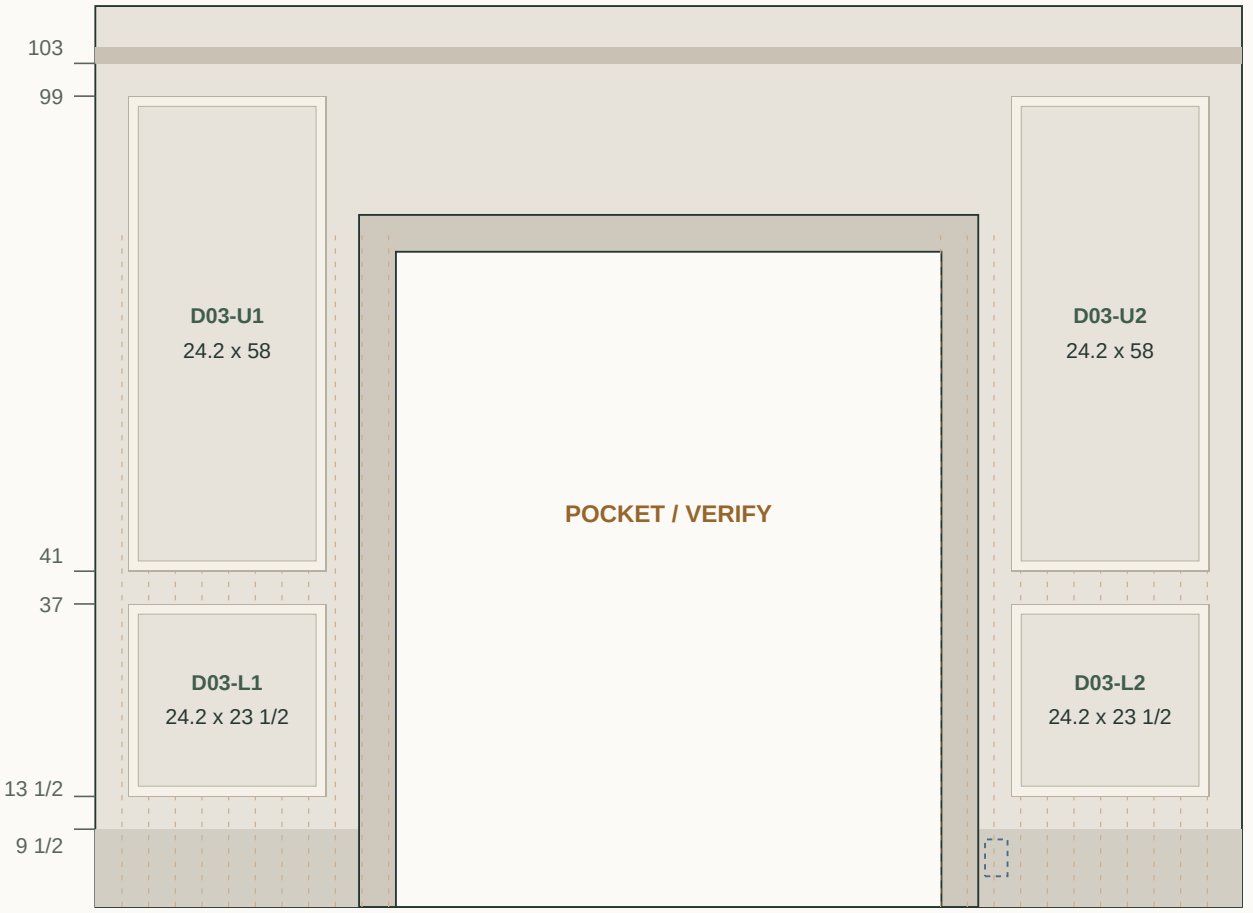

Proportional diagram - use written dimensions; not field setout.

SOURCE / OPEN ITEMS

Separate face from L02: measure each pier on this side independently. The 32.2-in piers are illustrations.

Original baseboard outlet is retained as source evidence, not a verified field envelope. No new D6 in a pocket cavity.

No fixings into unknown pocket travel or door hardware.


Nominal vertical basis: base top 9 1/2; high-trim underside 103. Follow retained trim; floor build-up unknown. Subfloor marks are not supplied.

Outside frame dimensions / inches. Face 1 1/4 shown for comparison only; profile and finish unselected.

D04 / panel and art-cover interface

Upper + lower frames / no chair rail

OPTION A / NO RAIL - CHAIR RAIL UNDECIDED - REVIEW ONLY / DO NOT CUT

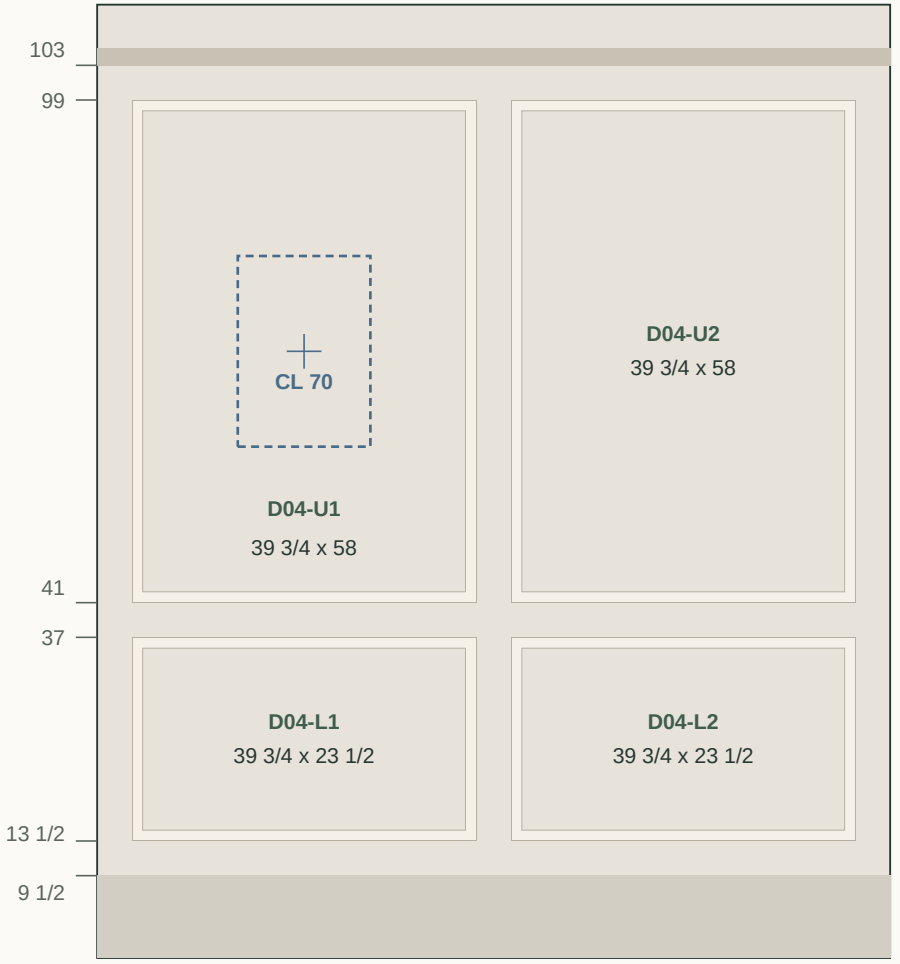

Left edges from source x=0: 4 / 47 3/4

SOURCE RUN 91 1/2 in

Proportional diagram - use written dimensions; not field setout.

SOURCE / OPEN ITEMS

Use later derived W approx.91 1/2, not old 94-in illustration. Datum: outside window-casing edge toward the right inside corner.

Retain recorded panel CL 23 7/8 horizontally and 70 vertically. Upper frame centre is exactly 23 7/8,70. No D5 outlet.

Dashed 15.3 x 22 envelope is a catalog cover placeholder. Verify actual panel/trim, door opening and access before any cover or fixing detail.

Art-cover size, hinge/sweep and mounting are UNRESOLVED. No enclosure or access obstruction is approved.


Nominal vertical basis: base top 9 1/2; high-trim underside 103. Follow retained trim; floor build-up unknown. Subfloor marks are not supplied.

Outside frame dimensions / inches. Face 1 1/4 shown for comparison only; profile and finish unselected.

Hallway / long fixed-wall study

SCHEMATIC - ACTUAL WIDTHS UNKNOWN

OPTION A / NO RAIL - CHAIR RAIL UNDECIDED - REVIEW ONLY / DO NOT CUT



P = ? / actual casing/corner endpoints

Illustrated bay count is conditional; no hallway quantity.

Applies to: H-P01. Each physical face is counted once; reverse photographs may show the same run.

Option A studies aligned upper/lower pairs without rail on eligible fixed walls. Existing HA/HB/HC hall alternatives remain available; no final choice.

For N equal pairs and 4-in reveals: outside width=(P-4(N+1))/N. N remains a design decision after actual usable lengths and obstructions are recovered.

Base top, high trim, plates, casing changes and final door hardware are not verified here. Inherit no 61-in sample width or six-piece allowance.

H-P02 patch/services and H-P03 Murphy sweep must resolve before assigning a frame. Keep the door/bookcase face and moving envelope free of fixed molding.

Hallway / short fixed-wall pieces

SCHEMATIC - ACTUAL WIDTHS UNKNOWN

OPTION A / NO RAIL - CHAIR RAIL UNDECIDED - REVIEW ONLY / DO NOT CUT



Illustrated bay count is conditional; no hallway quantity.

Applies to: H-P02, H-P03, H-P04. Each physical face is counted once; reverse photographs may show the same run.

Option A studies aligned upper/lower pairs without rail on eligible fixed walls. Existing HA/HB/HC hall alternatives remain available; no final choice.

For N equal pairs and 4-in reveals: outside width=(P-4(N+1))/N. N remains a design decision after actual usable lengths and obstructions are recovered.

Base top, high trim, plates, casing changes and final door hardware are not verified here. Inherit no 61-in sample width or six-piece allowance.


H-P02 patch/services and H-P03 Murphy sweep must resolve before assigning a frame. Keep the door/bookcase face and moving envelope free of fixed molding.

Windows, narrow returns and door interfaces

Upper + lower frames / no chair rail

OPTION A / NO RAIL - CHAIR RAIL UNDECIDED - REVIEW ONLY / DO NOT CUT

H-W01 / L04 / BEDROOM B

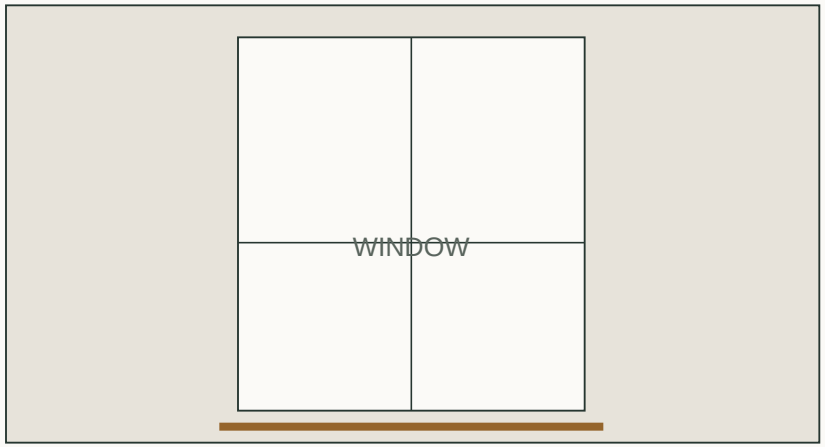


PIERS / SILL / APRON = ?

Hall H-W01: measure each pier and the below-window field independently. Place paired rows only where both fit; any below-window exception remains unresolved. No assumed equal widths.

Living L04 has an unresolved bay-wall/outlet reference, not a measured frame design. Keep it in the register; no invented frame count. Bedroom B remains the unframed east bay wall.

H-P03 / H-P04 / POCKET & MURPHY

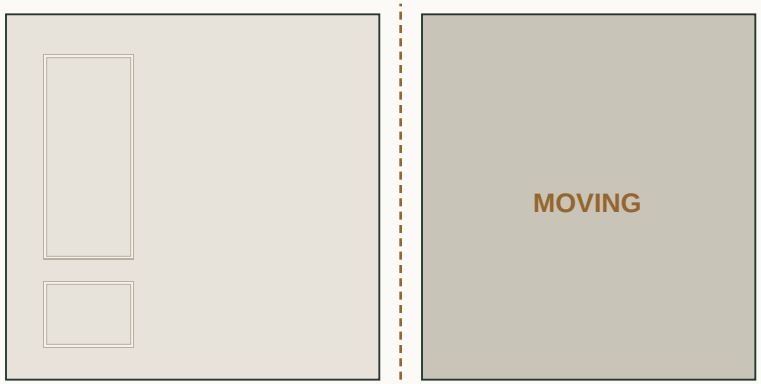


Terminate every fixed frame before casing/corner and the verified moving envelope. Proposed 4-in casing margin is measured from the OUTSIDE casing edge. No chair-rail end returns are needed.

Do not wrap a rectangle across a corner or bridge a door seam. H-P04 is a separate return, not part of the window face. Pocket backing/fastener depth and Murphy sweep remain unknown. NTS.

Bedroom installation / tape-fit separate pieces

Upper + lower frames / no chair rail

OPTION A / NO RAIL - CHAIR RAIL UNDECIDED - REVIEW ONLY / DO NOT CUT

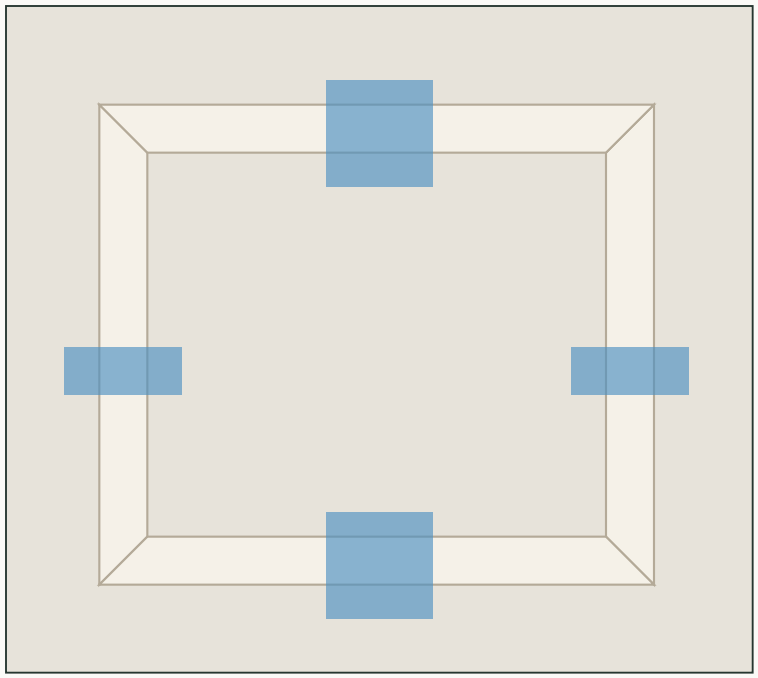

FOUR SEPARATE PIECES

Tape is temporary

1. After layout approval, pencil the outside rectangle aligned to the retained trim. Check full cover plates, openings and fixing exclusions.

2. Cut and dry-fit four separate pieces directly on the wall. Hold them with painter's tape; inspect all four miters, reveals and alignment.

3. Then fasten each piece using the substrate/product-specific method. Remove temporary tape and finish joints after the assembly is checked.

This replaces R2 bench preassembly, square-jig and whole-frame mounting instructions. No adhesive, brad length or penetration depth is selected here.

No fabrication or installation release: dimensions, material/profile, substrate and service/pocket exclusions still need their current checks.

Revised frame schedule / estimator handoff

Upper + lower frames / no chair rail

OPTION A / NO RAIL - CHAIR RAIL UNDECIDED - REVIEW ONLY / DO NOT CUT

Wall	Frames	Net LF
BA	6	73.7917
BC	6	75.6250
L01	6	76.7500
L02	4	43.3000
L03	5	67.3333
D01	4	63.1667
D02	4	71.8333
D03	4	43.3000
D04	4	53.6667
TOTAL	**43**	**568.7667**

OPTION A: NEW CHAIR RAIL = 0

Scope: bedroom A/C, L01-L03 and D01-D04.43 proposed frames;172 long-point pieces. Hallway and bay/door unknowns are in the design register, outside this numeric subtotal.

Net frame perimeter 568.766667 LF. Prior scenario 547.516667 LF. Increase 21.25 LF from lower-frame growth and bedroom side-width proposals.

Zero chair rail applies ONLY to Option A. Keep the existing Claremont /80-frame-stick /14-rail scenario as Option B for comparison, subject to estimator review; neither is an order.

No product, purchase quantity or stock credit selected. Usable stock, reservations and incoming lengths remain unknown. Existing estimator owns cost and net-to-order.

Editable geometry, outside cut-piece schedule and conditional stock study accompany this PDF. Geometry/profile/stock changes require recalculation.

Stock study / conditional cutting feasibility

Upper + lower frames / no chair rail

OPTION A / NO RAIL - CHAIR RAIL UNDECIDED - REVIEW ONLY / DO NOT CUT

This is a planning study, not a saw setup or order. Use the accompanying cut-study.json for exact board assignments and per-board residuals.

Assumed stock:96 in; end trim:1/4 in at each end; blade kerf:1/8 in. Primary study reserves two 45-degree cuts per piece, using longitudinal allowance 2 x 1/8 x square root of 2.

Lengths are OUTSIDE long-point dimensions. Confirm profile orientation, actual saw kerf, defects, usable stock and the selected joint before releasing a board map.

Do not add 15% automatically on top of a packed cut study. Estimator must choose one explicit allowance method and one pooled spare policy. No on-site stock deduction has been made.

Wall widths and frame proportions remain proposals. L02/D03 decimal widths retain source precision; they are not rounded into field cuts. Hallway has no assigned lengths.

Current handoff route: Interior Designer -> existing PM/coordinator -> existing estimator. Source material/profile sourcing remains with its existing stopped task until reactivated.

Conditional board patterns / 78 virtual sticks

Upper + lower frames / no chair rail

OPTION A / NO RAIL - CHAIR RAIL UNDECIDED - REVIEW ONLY / DO NOT CUT

Pattern	Boards	Outside long-point pieces (in)	Used (in)	Remainder (in)
P01	8	67 + 27	95.207	0.793
P02	4	67 + 24.2	92.407	3.593
P03	8	58 + 30 13/16	90.020	5.980
P04	12	58 + 24.2	83.407	12.593
P05	20	58 + 23 1/2	82.707	13.293
P06	8	54 + 39 3/4	94.957	1.043
P07	4	54 + 37	92.207	3.793
P08	2	52 + 41	94.207	1.793
P09	1	44 + 44	89.207	6.793
P10	2	43 + 43	87.207	8.793
P11	2	37 + 37 + 19 9/16	95.123	0.877
P12	5	23 1/2 + 23 1/2 + 23 1/2 + 23 1/2	95.914	0.086
P13	1	23 1/2 + 23 1/2 + 19 9/16 + 19 9/16	88.039	7.961
P14	1	19 9/16 + 19 9/16 + 19 9/16 + 19 9/16	80.164	15.836

78 stock slots / 172 pieces / no spare or defect allowance / no order quantity

P12 leaves only 0.086 in theoretically. Verify actual stock and saw setup; this tight-fit pattern is not a field cutting instruction. Full per-piece allocation is in cut-study.json.