Bedroom Wall B — Revision B

Tisa chose Option 3 on 2 Nov 2026: three equal tall bays, upper and lower frames, on Wall B. This revision replaces every Wall B instruction in the 12 October packet. Wall A, heights, profile, colours and outlets do not change.

Use with the 12 Oct packet. Written dimensions govern; do not scale. No purchase is authorized by this sheet.

What changes (Wall B only)

- Three lower frames are now 31 / 43 / 31 wide (were 35 / 35 / 35).
- Three new upper frames, 31 / 43 / 31 wide × 58 high, floor 41–99. The upper wall is no longer plain.
- Moulding order rises from 14 to 21 eight-foot boards; adhesive from 5 to 7 tubes; caulk from 2 to 3.
- Replaces packet pages 2–3 (Wall B lines), 6, 7 (O-A to O-C), 8–9 (quantities), 10 step 4, 11, 17, 20, 23 (Wall B) and 27.

What stays the same


- Wall A: all six frames, positions and cut sizes exactly as the packet.
- Baseboard 9½ (keep), chair rail 2-in face at 35–37, high trim underside 103 (keep), no crown.
- House of Fara 719 (1¼ face); Urbane Bronze eggshell walls, satin trim, flat ceiling.
- Outlet B3 at 60½ from the bay end, centre 11½ AFF, dark horizontal plate. It sits under frame B-L2.

1 Wall B — measured elevation

Stand at the bay windows and face the bedroom door: Wall B is on your LEFT, shared with the living room. Station 0 is the BAY end.



Wall B today — bay window left, entry door right

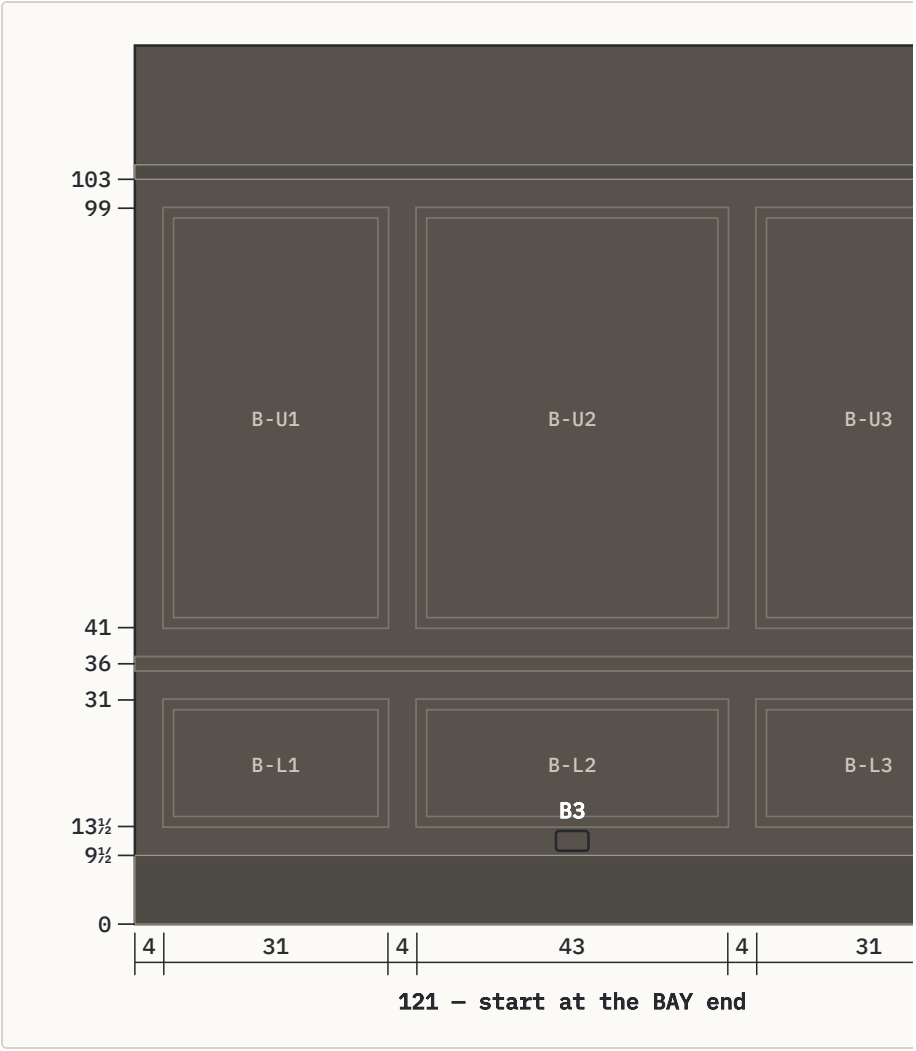

Check: 4 + 31 + 4 + 43 + 4 + 31 + 4 = 121. Composition centre 60½. Upper frames start 4 in above the chair-rail top (37 → 41); lower frames end 4 in below its bottom (31 → 35).

2 Frame schedule — Wall B (replaces O-A, O-B, O-C)

FRAME	LEFT → RIGHT	BOTTOM → TOP	OUTSIDE W × H	OPENING (1¼ FACE)
B-U1	4" → 35"	41" → 99"	31" × 58"	28½" × 55½"
B-U2	39" → 82"	41" → 99"	43" × 58"	40½" × 55½"
B-U3	86" → 117"	41" → 99"	31" × 58"	28½" × 55½"
B-L1	4" → 35"	13½" → 31"	31" × 17½"	28½" × 15"
B-L2	39" → 82"	13½" → 31"	43" × 17½"	40½" × 15"
B-L3	86" → 117"	13½" → 31"	31" × 17½"	28½" × 15"

All to OUTSIDE moulding edges; heights from finished floor. B-U = upper, B-L = lower, numbered from the bay end.

3 Cut list and board map — both walls (replaces pages 11 and 27)

LENGTH (LONG POINT)	PIECES	USE
67"	4	Wall A centre, horizontals
58"	10	Wall A upper sides (4) + Wall B uppers (6), verticals
44"	2	Wall A upper centre, verticals
43"	4	Wall B centre frames, horizontals
31"	8	Wall B side frames, horizontals
19"	8	Wall A side frames, horizontals
17½"	12	All lower-frame verticals (A 6 + B 6)

12 frames · 48 mitred pieces · 143 ft 2 in of finished frame moulding.

BOARD	CUTS (IN)	TOTAL
01–04	67 + 19	86
05–12	58 + 31	89
13–14	58 + 17½ + 17½	93
15	44 + 44	88
16–17	43 + 43	86
18 — sample	19 + 19 + 19 + 17½ + 17½	92
19	19 + 17½ + 17½ + 17½ + 17½	89
20	17½ + 17½	35
21	KEEP UNCUT — spare	—

Start with board 18: its first four pieces (19, 19, 17½, 17½) make the 19 × 17½ sample frame H-D, which is installed on Wall A. Tightest board is 93 in, the same 3-in margin the packet accepted for kerf and trimming. Check actual stock and blade kerf before cutting.

4 Materials (replaces page 8 quantities)

ITEM	PACKET QTY	REV B QTY	EACH (12 OCT LISTING)	EXTENDED
House of Fara 719, 8 ft	14	**21**	$10.28	$215.88
Loctite Power Grab Molding & Paneling, 9 oz	5	**7**	$5.06	$35.42
DAP ALEX FLEX 18542 caulk	2	**3**	$5.98	$17.94
DEWALT 18 ga × 1¼ brads, box 2,500	1	1	$18.99	$18.99
DAP Plastic Wood-X 00540	1	1	$8.48	$8.48
Zinsser Bulls Eye 1-2-3, 1 qt	1	1	$16.98	$16.98

Listed-price subtotal **$313.69** (was $225.63, +$88.06) before tax and shipping. With the packet's allowances (glue $7, sundries $20, satin trim paint quart $50) **$390.69**; with the $75 chair-rail allowance **$465.69**.

Adhesive: 143 ft 2 in of frames + 20 ft 5 in of chair rail at about 27.6 ft per tube = 5.9 tubes; 7 keeps the packet's allowance. Prices are the packet's 12 October listings, not re-checked today. No order placed; buying still needs Tisa's approval. One satin quart may run short with 48% more moulding; check before buying a second.

5 Crew steps — Wall B changes

- **Step 4, tape outlines:** Wall B, from the bay end, outside edges at 4–35, 39–82, 86–117. Lower bottoms/tops 13½ / 31. Upper bottoms/tops 41 / 99. Wall A is unchanged.
- **Step 5, check:** Wall B composition centred at 60½; outlet B3 centred under B-L2.
- **Step 12, inspect:** Wall B: 4-in margins and gaps on all six frames; upper and lower frames share the same vertical edges.
- Upper frames on Wall B sit on the shared living-room wall: locate studs and concealed services before brads, same as the packet.

Sources: Unit 4 Bedroom Complete English Packet, 12 Oct 2026; Wall B options review R1, 2 Nov 2026 (Option 3 chosen by Tisa). English edition; a separate synchronized Spanish edition exists; English governs on conflict.