
Bathroom source plan

QUANTITY & MEASUREMENT SUPPLEMENT

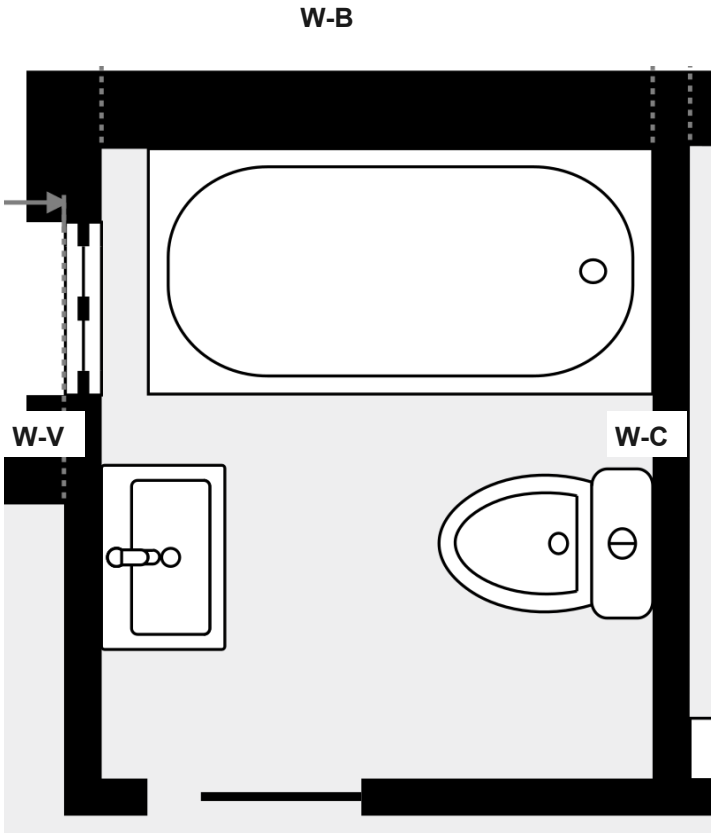

NTS / SIN ESCALA

Accepted record / inches	Value / Valor
Width	72 1/8
Depth	82 1/8
Entry	28
Entry height	80[1]
Door to right corner	38 1/8
Window edge to entry corner[2]	50

Sheets / Hojas

B01 Source plan
B02 Surface identification
B03 Area takeoff
B04 Stone, trim and finish status
B05 Next work and release holds

From the entry: sink left, toilet right, tub across the back; window/ivory ledge left, controls/drain right.

F-GROSS = 41.1337890625 sq ft (41.13 reported). Gross rectangle includes the tub enclosure. Native Magicplan text 41.14 is a model label, not the exact calculation.

Native wall/fixture paths are preserved from S0. Text labels are hidden in this working crop for clarity; the untouched SVG remains in sources/. Fixture shapes and offsets are model information, not measured setout. No new north direction is asserted.

[1] 80-in entry height is recorded in S1; pocket-door frame/slab/rough opening are separate specialist scope. [2] Left window edge toward bottom/entry corner, as S2 describes; verify the actual endpoint before using it for a new opening or trim cut.

Sources: S0 native SVG; S1 accepted measurement record; S2 saved/reopened bathroom correction, October 14. No whole-unit recalibration performed.

English governs. No cutting or purchasing release.

Surface identification


QUANTITY & MEASUREMENT SUPPLEMENT

W-B BACK WALL




Subtract niche openings once.

W-V WINDOW END

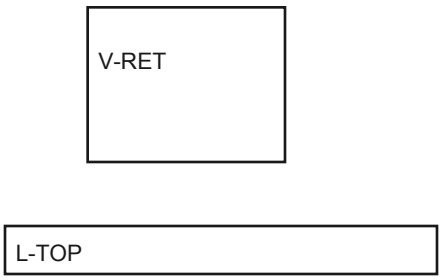

LEDGE FACE INVENTORY



L-END

W-C CONTROLS END

Tile height + extent: unresolved.

No valve or glass setout here.

NTS - identification diagrams only. Rectangles do not define heights, widths, niche positions or a tile layout. W-B, W-V and W-C are viewed facing each wall from inside the bathroom.

Niches: N1 about 12 in wide × 20–24 high, with divider; N2 about 8–10 in square toward controls. These are recorded design targets. Final depth, heights, horizontal positions and shelf material remain unresolved.

Finish allocation: warm ivory ceramic on shower walls and separate window ledge; matte warm limestone-look porcelain on the floor; original marble top and front retained. Measure every exposed ledge face separately. Slope toward tub remains required by the recorded design; slope/detail is not issued here.

HOLD: resolve the wall–marble–tub waterproofing connection before concealment. No revised framing section, valve location, slab cut or glass template is released by these diagrams.

Area takeoff

QUANTITY & MEASUREMENT SUPPLEMENT

All lengths in inches; areas in sq ft. A missing quantity is unresolved, never zero. For niche formulas: w = finished width, h = finished height, d = finished depth.

ID / Surface	Quantity / Basis	Needed / Limit
F-GROSS Gross room rectangle	41.133789 sq ft 72.125 × 82.125 / 144	Accepted room record; includes tub enclosure. [S1/S2]
F-NET Installed floor tile	UNRESOLVED Actual finished floor polygon minus agreed non-tiled footprints; threshold once.	Need finished enclosure/ledge/front footprint and under-fixture tile scope. [S3]
W-B Back shower wall	UNRESOLVED Tiled width × tiled height / 144 − openings within tile extent.	Need finished tiled width/height; deduct N1 and N2 openings once. [S3]
W-C Controls-end wall	UNRESOLVED Tiled width × tiled height / 144 − openings within tile extent.	Need finish planes and tile start/stop heights. [S3]
W-V Window-end wall	UNRESOLVED Tiled width × tiled height / 144 − window opening within tile extent.	Need tile extent and actual window opening. [S3]
V-RET Window reveals	UNRESOLVED Sum each tiled reveal face area / 144.	Measure each face; exclude surfaces counted as L-TOP/L-FR/L-END. [S3]
N1 Large niche faces	UNRESOLVED (w × h + 2 × d × h + 2 × w × d) / 144; shelf separate.	Design target about 12 wide × 20–24 high; depth and final dimensions missing. [S3/S4]
N2 Small niche faces	UNRESOLVED (w × h + 2 × d × h + 2 × w × d) / 144.	Design target about 8–10 square toward controls; depth/position missing. [S3/S4]
N1-S Niche divider shelf	UNRESOLVED Sum only exposed tiled shelf faces / 144.	Need material, thickness, depth and exposed face dimensions. [S3]
L-TOP Window ledge top	UNRESOLVED Actual sloped tile-face area / 144.	Need finished length/depth and slope detail; 6 1/8 is not a cut. [S3]
L-FR Ledge exposed front	UNRESOLVED Actual exposed length × height / 144.	Count only if tile-covered and exposed. [S3]
L-END Ledge side returns	UNRESOLVED Sum actual exposed side faces / 144.	Confirm number of exposed returns. [S3]

Niche face formulas describe an empty rectangular recess. Adjust for any untiled contact surfaces covered by the divider; do not count hidden surfaces twice.

Stone, trim and finish status

QUANTITY & MEASUREMENT SUPPLEMENT

ID / Item	Quantity / Basis	Needed / Limit
M-TOP Original marble top	1 piece Owned original; outer area minus existing cutout only after measurement.	Reuse. Dimensions/condition/overhang still needed; no new stone order. [S3/S5]
M-FR Original marble front	1 piece Owned original; length × height after measurement.	Reuse. Thickness/joint/finished-floor relation control fitting. [S3/S5]
TR-C Crown molding	UNRESOLVED Sum actual installed ceiling runs / 12.	Gross rectangular perimeter = 25.708333 ft; not an order length. Verify above-window clearance. [S1/S3]
TR-B Dry-wall baseboards	UNRESOLVED Sum actual dry-wall baseboard runs / 12.	Exclude door/wet/enclosure interruptions; record corners and ends. [S3]
TR-E Exposed tile edges	UNRESOLVED Sum each exposed edge once / 12.	Need profile, corners and tile thickness. [S3]
TR-T Threshold	UNRESOLVED Actual finished threshold length / 12.	28-in entry is an accepted opening; not a threshold cut dimension. [S1/S3]

Recorded selections and inventory

Item	Status [S3/S5]
Floor / shower tile	Finish direction recorded; exact SKU, size, layout, joint/grout and stock unverified.
Tub / sink	1 owned tub and 1 owned pedestal sink. No repurchase. Tub nominal 66 × 32 × 22 in; not enclosure/cut dimensions.
Glass / grab bar	1 partial clear panel at controls end; 1 horizontal grab bar. Sizes, anchors and exact positions pending.
Decorative wainscoting	On hold. Crown and dry-wall baseboard profiles/runs still need selection and measurement.

Order only after net area, exact SKU, stock, cut/spare factor and carton coverage are confirmed. No waste factor or carton count is assigned. Selection, purchase, delivery, installation and acceptance remain separate.

Next work and release holds

QUANTITY & MEASUREMENT SUPPLEMENT

- ☐ JOHN / TILE INSTALLER
  Dry-fit the owned tub and stone. Record the finished enclosure, front and ledge footprint so the producer can calculate F-NET. State whether tile runs under the pedestal, toilet and stone front; include the threshold once.
- ☐ JOHN / TILE INSTALLER
  Record W-B, W-C and W-V tiled widths and actual start/stop heights. Measure the window opening and each reveal. Locate both niches; record finished opening width, height, depth and divider shelf faces. Do not substitute the design targets for these measurements.
- ☐ JOHN / STONE INSTALLER
  Retain the original top and front as fitting templates. Record lengths, widths, thickness, opening, overhangs and joint type. Measure actual flange bearing heights from subfloor and finished floor; the floor build-up is still a decision. No stone cut or frame height is issued here.
- ☐ TISA / PRODUCER
  Choose exact floor/wall tile, layout, grout/joint and edges; settle floor build-up and trim profiles. Inventory usable matching stock. Calculate cartons from measured net quantity, agreed allowance and manufacturer carton coverage.
- ☐ PRODUCER / RESPONSIBLE TRADES
  Keep the wall–marble–tub waterproofing connection and drain service-access decision open until resolved. Preserve photos before concealment. Existing pocket-door specialist retains door construction scope.
- ☐ PRODUCER
  Update this one schedule after new measurements. Rebuild both language editions from the same IDs/data, check dependent quantities, and verify the actual exported sheets before release.

Source key and ownership

S0: original Magicplan SVG, preserved byte-for-byte. S1: accepted measurement record 2026-10-13. S2: bathroom correction / impact audit 2026-10-14. S3: native bathroom Doc read 2026-10-29, modified 22:49:36Z. S4: owner design brief 2026-10-10; later corrections govern. S5: bathroom producer resume and receipt 2026-10-14. Exact paths and SHA-256 hashes: SOURCE-MANIFEST.json.

This supplement does not replace the full installation manual. Cloud master remains the same canonical Doc. Earlier producer history and session are retained; this R1 is local quantity work. No crew delivery or construction acceptance is claimed.