Unit 4 Kitchen — To-Scale Sheet Set R8

1231 11th Ave, Unit 4, San Francisco · 2 Nov 2026 · R8: plain labels; sink drawn; switch & outlet proposal on K-S6/K-S7 · REVIEW DRAFT · English

Sheets

K-S0 This index, scale check and key numbers
K-S1 Floor plan (cabinets, openings, clearances)
K-S2 South wall elevation — sink / window / pie-safe
K-S3 East wall elevation — fridge / old doorway / subpanel
K-S4 West wall elevation — range / hood / duct / tile
K-S5 South run change record (sink moved to window)
K-S6 Switches, outlets & lights — proposed layout
K-S7 Device schedule (table)

Scale check — print at 100% (no 'fit to page')



This bar must measure exactly 2" for 4 ft (1/2" = 1'-0").

Room geometry (Magicplan MASTER plan, live 2 Nov)

South wall 147 · North wall 115 1/2 · East wall 126 (Magicplan room size 147 × 126 1/4)
West wall 66 1/4 (range run) · step 31 1/2 · recess wall 59 3/4 · ceiling 121 1/2 (3.0869 m)
Window 33 13/16 × 58 1/8, sill 45 15/16 / head 104 1/16 AFF, 72 7/8 from SE · rear door 25 7/8 × 78 5/8 · hall 29 1/2 × 79
Field cross-check: John 10/13 measured kitchen 115 9/16 / 146 5/8 / depth 125 (model 115 1/2 / 147 / 126).

Legend

base cabinet · appliance · overhead / hidden / estimate · RED = check before cutting

countertop outlet (owner proposal, electrician confirms)

Not yet fixed — shown as TBD, never guessed

Pie-safe size TBD (Tisa). · Finished floor thickness (floor not chosen yet).
Old doorway jambs / header (John's site checks). · Zephyr chimney cover width. · Hood fan rating (CFM).
Upper cabinets optional — shown dashed only where your Magicplan has them.

Geometry source: Magicplan project 44f4fc6f / plan abb2d2c6; SVG export S01 (meters) checked against Magicplan's own labels to ±1/16". Manuals: Viking S10, Zephyr S11, Haier S08.

K-S1 Kitchen floor plan — to scale

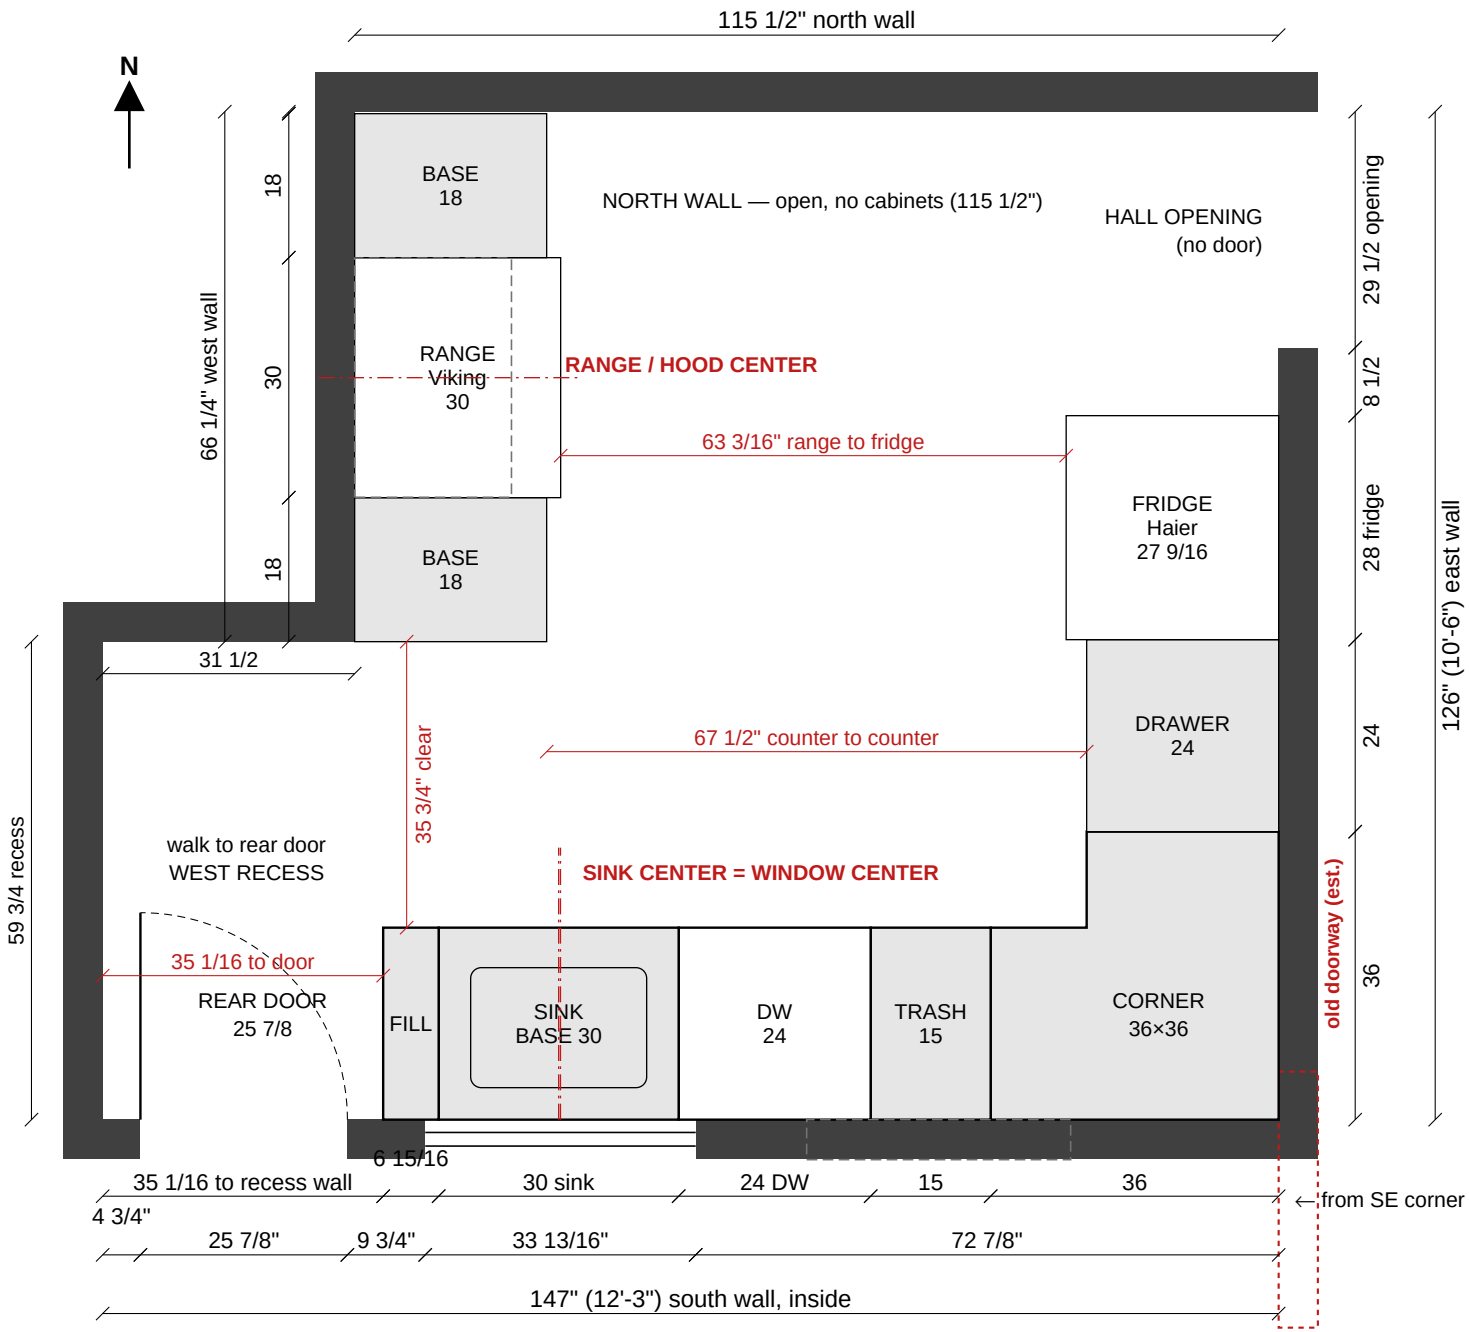

1231 11th Ave · Unit 4

San Francisco CA 94122 · Kitchen

K-S1

Kitchen floor plan

Rev R8 · 2026-11-02
Status: REVIEW DRAFT — not a cut release; nothing ordered.
Supersedes: R1–R7 sheets + earlier NTS diagrams.

Notes

Per Tisa's Magicplan 11/2: sink in front of window. S run from SE: 36 corner + 15 trash + 24 DW + 30 sink + 6 15/16 filler = 111 15/16. E 36+24+28 = 88; W 18+30+18 = 66.
Dashed = overhead/hidden (hood, pie-safe, old doorway).

RED = check items:
- Sink center 90 = window center 89 3/4 (Magicplan; John confirms on site).
- Walk to rear door: 35 3/4 past range run, 35 1/16 past filler end.
- Old doorway position is an estimate (John checks).
- Hall opening 8 1/2" past fridge zone (casing not modeled).

SCALE 1/2" = 1'-0" (1:24)
on letter, print at 100%

0' 1' 2' 3' 4'

Geometry: Magicplan MASTER plan abb2d2c6 (live 11/2) + SVG export S01 cross-checked to labels ±1/16".
Heights = AFF (finished floor).

K-S2 South wall (sink / window wall) — elevation, to scale

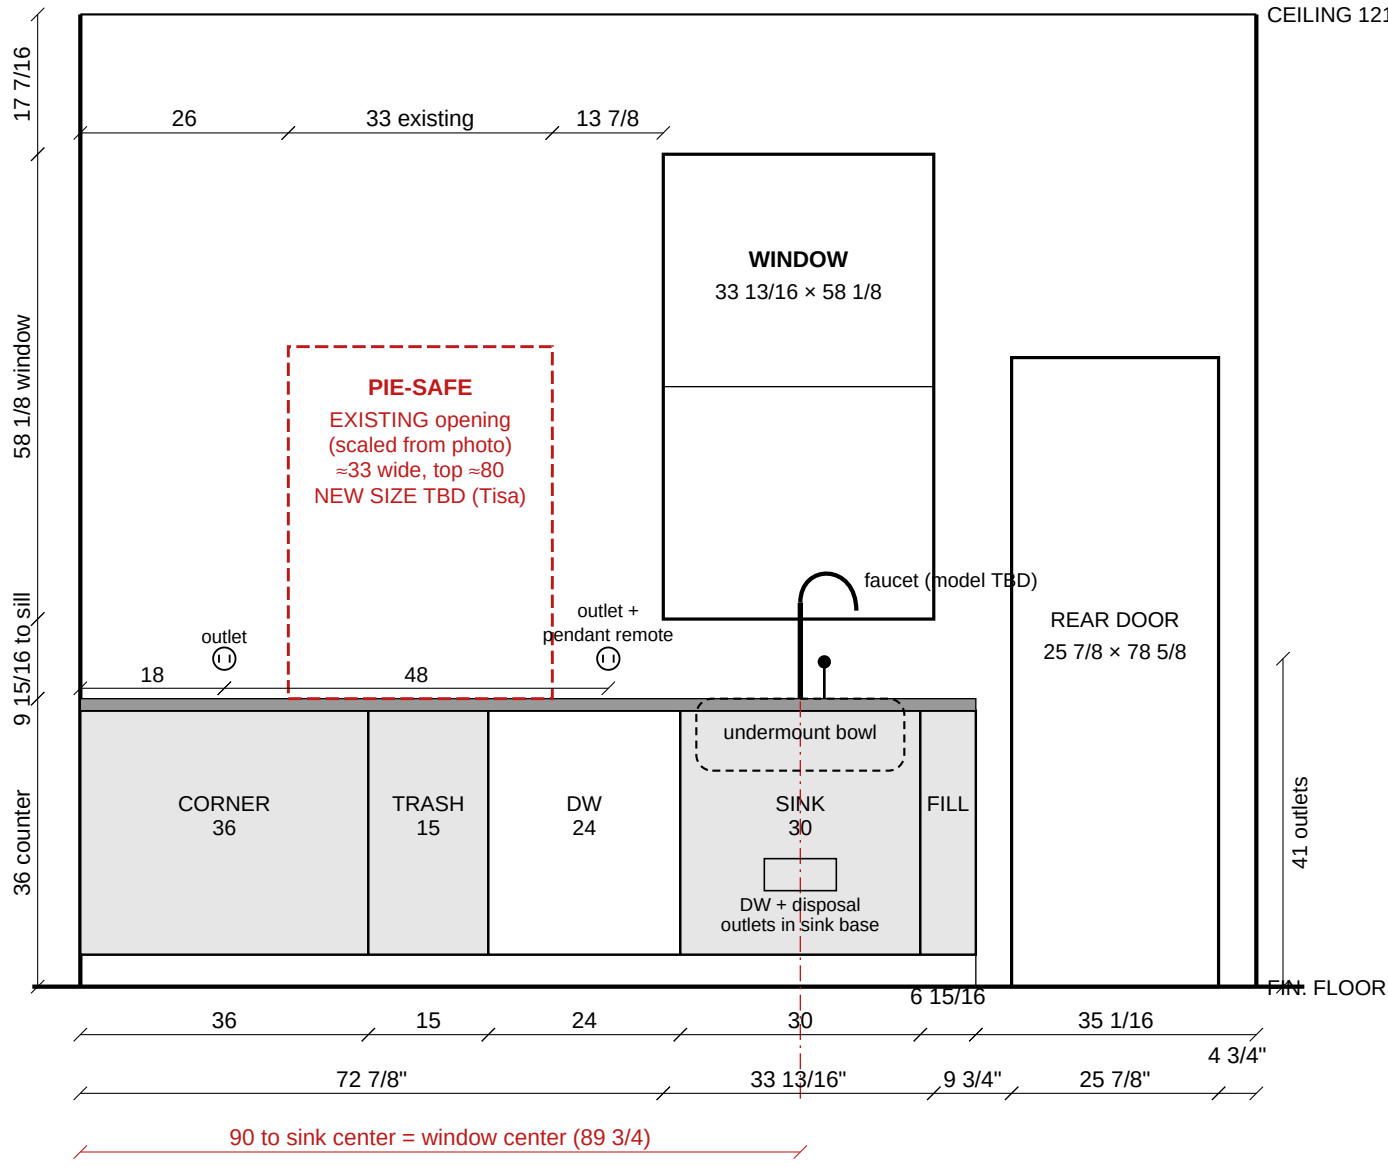

← LEFT = SE corner (east) looking SOUTH from inside RIGHT = SW recess corner →

1231 11th Ave · Unit 4

San Francisco CA 94122 · Kitchen

K-S2

South wall elevation (sink / window wall)

Rev R8 · 2026-11-02
Status: REVIEW DRAFT — not a cut release; nothing ordered.
Supersedes: R1–R7 sheets + earlier NTS diagrams.

Notes

Heights AFF (floor TBD).
Window from Magicplan elevation: sill 45 15/16, head 104 1/16.

PIE-SAFE: new size TBD (Tisa). Dashed = existing opening, scaled from your photo off the window: ≈26–59 from SE, top ≈80 AFF (±1"). Magicplan placeholder (29–61, 43–97) does not match the photo.

Outlets beside, never under, the pie-safe: at 18 and 66, 41 AFF, 48 apart. Re-check when pie-safe size is set. Electrician confirms.

Sink center 90 = window center. Photo: existing drain/supply stubs ≈81–85 from SE → plumber moves them to 90.

SCALE 1/2" = 1'-0" (1:24)
on letter, print at 100%

0' 1' 2' 3' 4'

Geometry: Magicplan MASTER plan abb2d2c6 (live 11/2) + SVG export S01 cross-checked to labels ±1/16". Heights = AFF (finished floor).

K-S3 East wall (fridge wall) — elevation, to scale

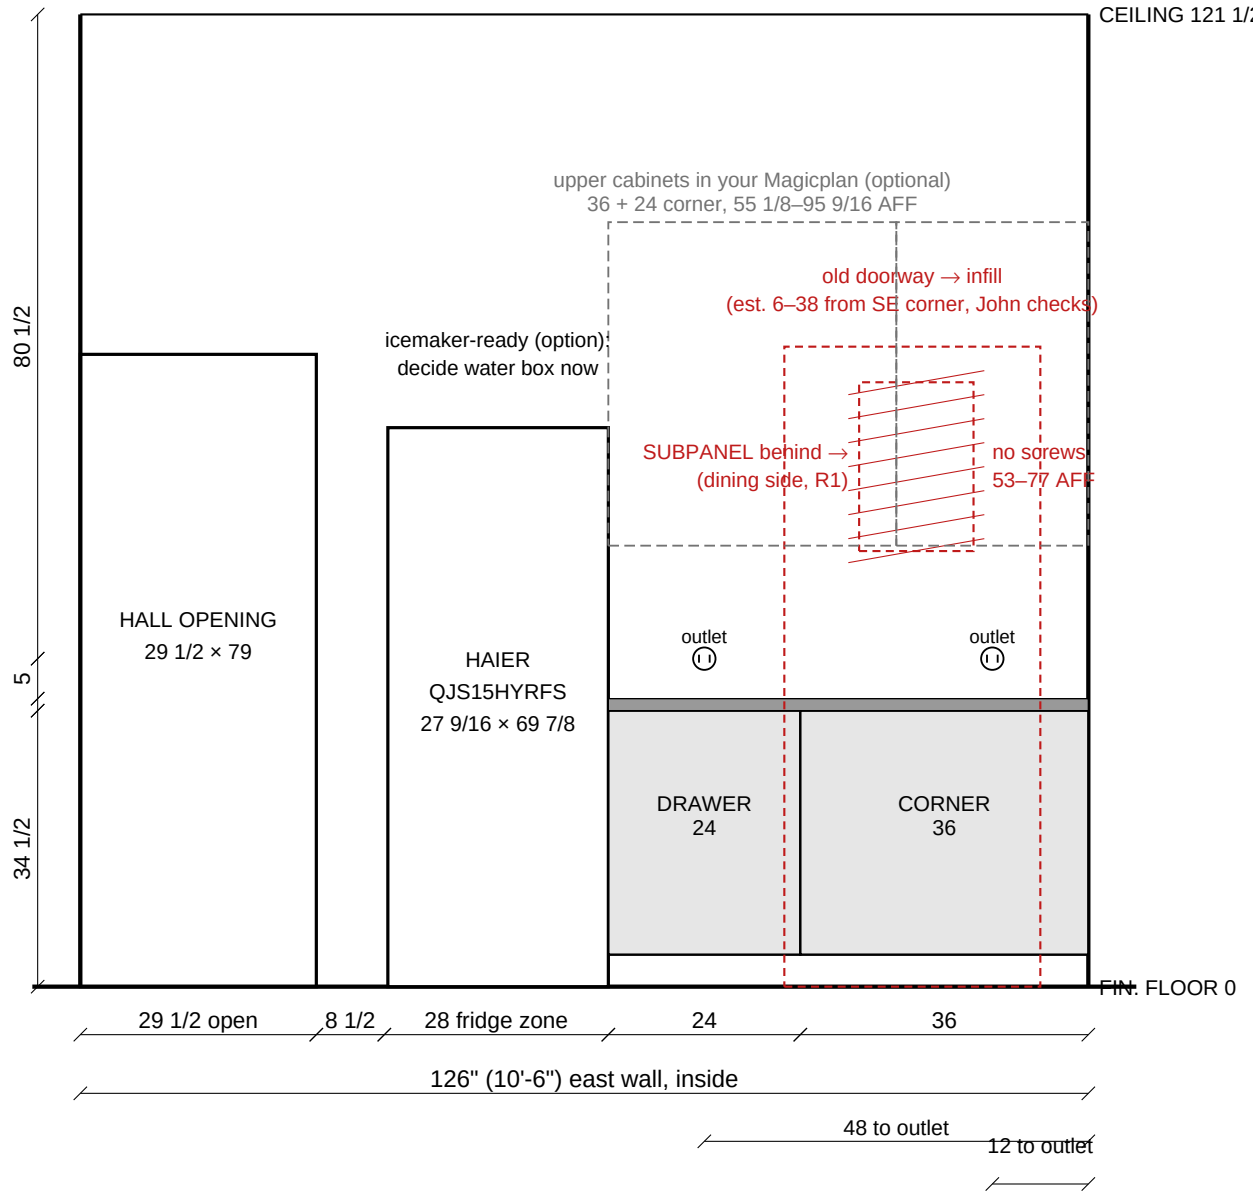

1231 11th Ave · Unit 4

San Francisco CA 94122 · Kitchen

K-S3

East wall elevation (fridge wall)

Rev R8 · 2026-11-02
Status: REVIEW DRAFT — not a cut release; nothing ordered.
Supersedes: R1–R7 sheets + earlier NTS diagrams.

Notes

Heights AFF (floor TBD). Outlets 41" up, at 12 and 48 from the SE corner, are the existing owner proposal; electrician confirms.

Fridge freestanding, nothing above (owner). 2" rear gap. Haier is icemaker-ready: a water box is cheap now, hard later — decide.

Old doorway and subpanel positions per Infill R1 — estimates until John checks.

Uppers dashed = your Magicplan model; still optional.

SCALE 1/2" = 1'-0" (1:24)
on letter, print at 100%

0' 1' 2' 3' 4'

Geometry: Magicplan MASTER plan abb2d2c6 (live 11/2) + SVG export S01 cross-checked to labels ±1/16". Heights = AFF (finished floor).

K-S4 West wall (range / hood wall) — elevation, to scale

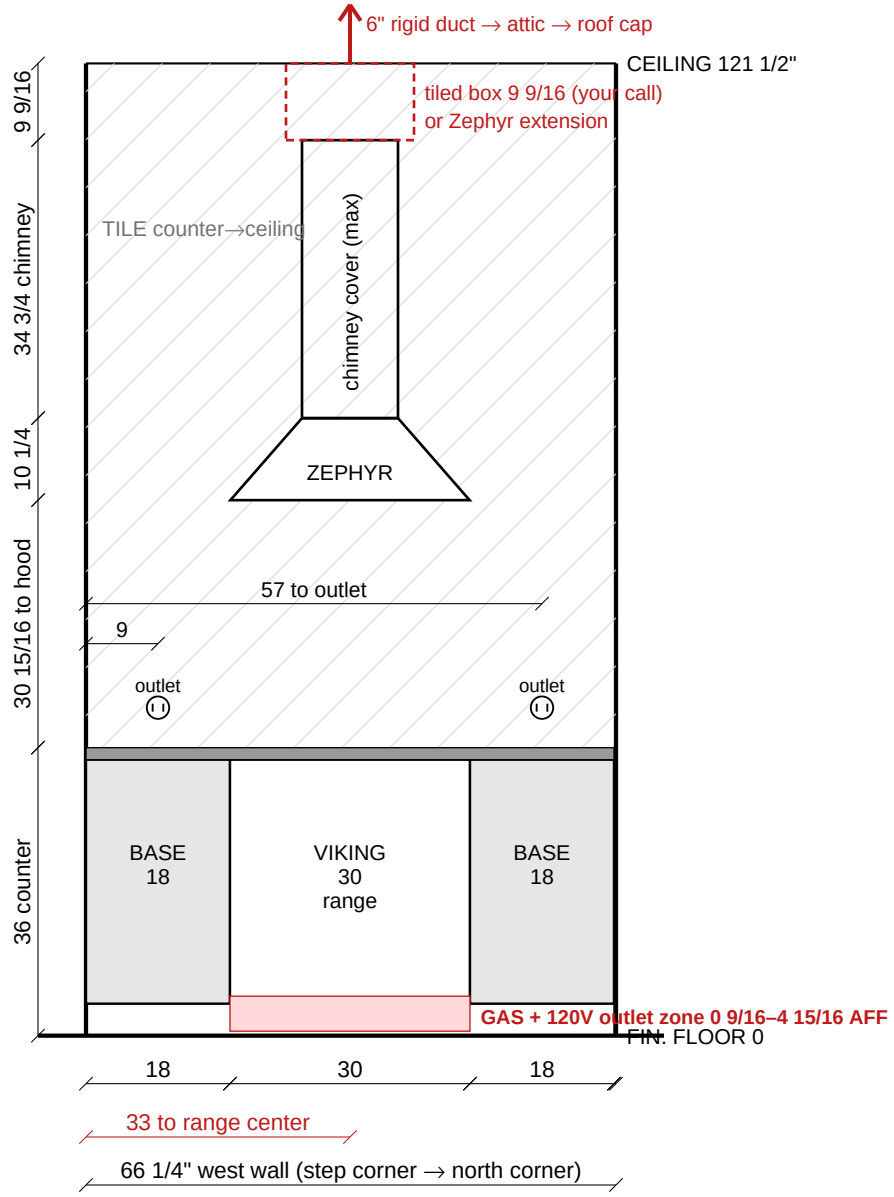

← LEFT = south end (step to recess) looking WEST RIGHT = north corner →

1231 11th Ave · Unit 4

San Francisco CA 94122 · Kitchen

K-S4

West wall elevation (range / hood wall)

Rev R8 · 2026-11-02
Status: REVIEW DRAFT — not a cut release; nothing ordered.
Supersedes: R1–R7 sheets + earlier NTS diagrams.

Notes

Hood bottom 66 15/16 AFF (your Magicplan) = 30 15/16 above counter (Viking 30–36 OK). Zephyr hood+chimney 30–45 tall → max top 111 15/16; ceiling 121 1/2 → 9 9/16 gap.

Zephyr chimney cover width not in manual — drawn 12" nominal, measure the unit.

Gas + range outlet only in the shaded band behind the range (Viking p.13).

Tile counter→ceiling full 66 1/4. No uppers here. Outlets 41" up, each side.

SCALE 1/2" = 1'-0" (1:24)
on letter, print at 100%

0' 1' 2' 3' 4'

Geometry: Magicplan MASTER plan abb2d2c6 (live 11/2) + SVG export S01 cross-checked to labels ±1/16". Heights = AFF (finished floor).

K-S5 South run change record — sink moved in front of window

OLD (K002, SUPERSEDED 11/2): corner · trash · sink · DW

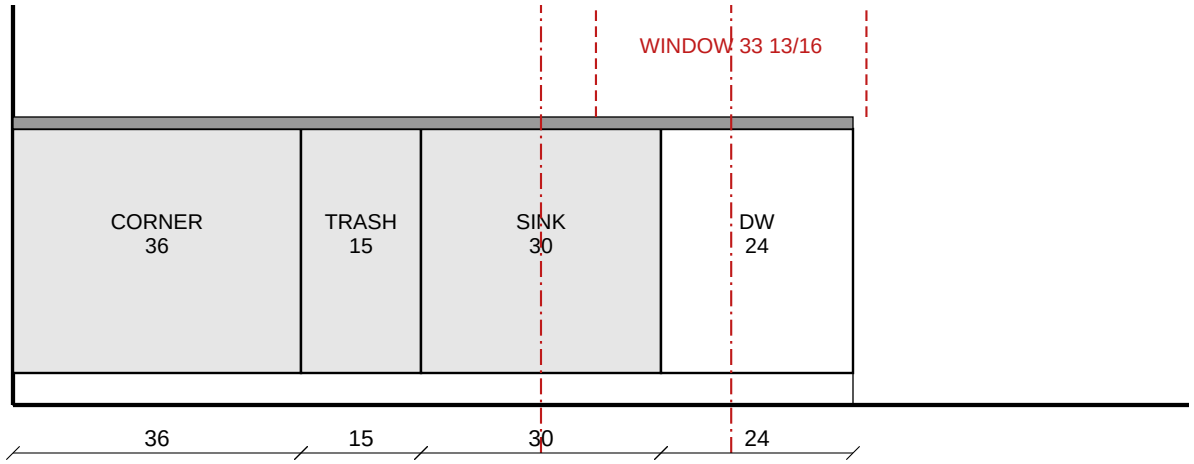

sink center 66" from SE corner · window center 89 3/4" · off by 23 3/4"

CURRENT — LOCKED by Tisa 11/2: sink in front of window

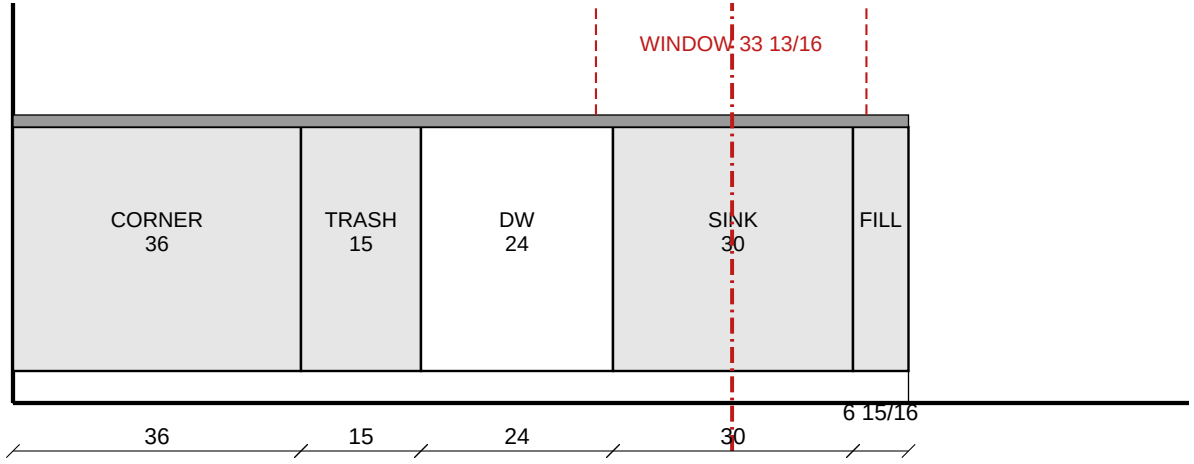

sink center 90" from SE corner · window center 89 3/4" · off by 0 1/4"

1231 11th Ave · Unit 4
San Francisco CA 94122 · Kitchen

K-S5

South run change record

Rev R8 · 2026-11-02
Status: REVIEW DRAFT — not a cut release; nothing ordered.
Supersedes: R1–R7 sheets + earlier NTS diagrams.

Notes

Facts (Magicplan model): window 72 7/8–106 11/16 from SE corner; center 89 3/4.

OLD: sink center 66, 23 3/4 off the window. SUPERSEDED.

CURRENT (Tisa's Magicplan 11/2): sink in front of window; DW between trash and sink; 6 15/16 filler at west end. Run 111 15/16; sink center 90. Pie-safe size TBD (Tisa).

Plumber: drain + supplies on 90. John confirms window position on site first.

SCALE 1/2" = 1'-0" (1:24)
on letter, print at 100%



Geometry: Magicplan MASTER plan abb2d2c6 (live 11/2) + SVG export S01 cross-checked to labels ±1/16". Heights = AFF (finished floor).

K-S6 Switches, outlets & lights — proposed layout (mark up)

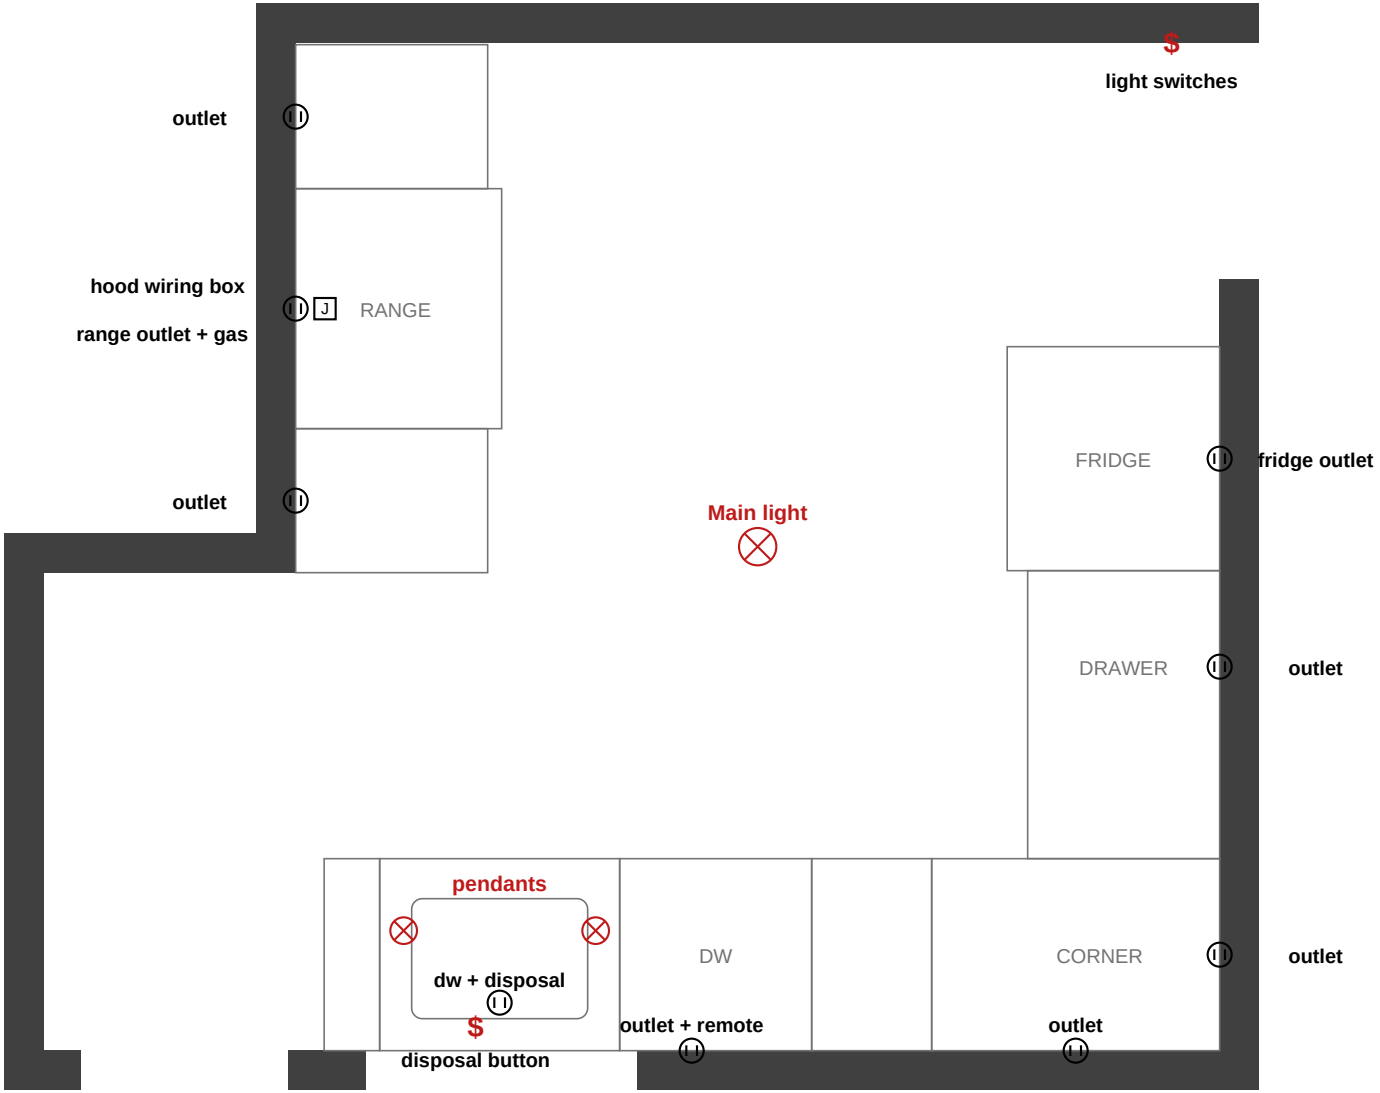

Counter outlets all 41" up (5" above the counter), never under the pie-safe or a window. Full list with distances on K-S7.

1231 11th Ave · Unit 4

San Francisco CA 94122 · Kitchen

K-S6

Switches, outlets & lights (proposal for Tisa)

Rev R8 · 2026-11-02
Status: REVIEW DRAFT — not a cut release; nothing ordered.
Supersedes: R1–R7 sheets + earlier NTS diagrams.

Notes

PROPOSAL — mark what moves.

Entry: 3-gang on the north wall beside the hall opening, 48" up: main / pendants / under-cabinet (if uppers).

Sink: no wall switch. Disposal on a sink-deck air button; wireless pendant remote on the outlet at 66.

All counter outlets 41" up. Pendants: 12" each side of sink center, 15" off wall.

Electrician confirms code spacing, GFCI/AFCI, boxes.

SCALE 1/2" = 1'-0" (1:24)
on letter, print at 100%

0' 1' 2' 3' 4'

Geometry: Magicplan MASTER plan abb2d2c6 (live 11/2) + SVG export S01 cross-checked to labels ±1/16". Heights = AFF (finished floor).

K-S7 Device schedule — every switch, outlet and light

Item	Wall	Measured from	Distance	Height	What
Light switches	North	from NE corner	6"	48"	3 switches at the entry: main light / pendants (dimmers) / under-cabinet lights only if uppers
Outlet	East	from SE corner	12"	41"	counter outlet (fridge-wall circuit)
Outlet	East	from SE corner	48"	41"	counter outlet (fridge-wall circuit)
Fridge outlet	East	behind fridge	see note	TBD	fridge outlet on its own circuit — height/spot per Haier manual
Outlet	South	from SE corner	18"	41"	counter outlet (sink-wall circuit), beside pie-safe
Outlet + remote	South	from SE corner	66"	41"	counter outlet (sink-wall circuit) + wireless pendant remote, one plate
DW + disposal	South	inside sink base	90"	12"	dishwasher outlet + disposal outlet (each its own circuit)
Disposal button	Counter	sink deck, right of faucet	93"	36"	push button for the disposal (no wall switch)
Outlet	West	from south end of range run	9"	41"	counter outlet left of range (range-wall circuit)
Outlet	West	from south end of range run	57"	41"	counter outlet right of range (range-wall circuit)
Range outlet + gas	West	behind range (center 33)	33"	2 3/4"	range 120V outlet + gas stub, zone 0 9/16–4 15/16 AFF
Hood wiring box	West	in chimney cover (center 33)	33"	100"	hood is hardwired here
Pendants (2)	Ceiling	SE corner; 15 off south wall	see note	TBD	2 pendants over the sink run at 78 and 102 (12 each side of the sink center)
Main light	Ceiling	room center	see note	TBD	main light, centered in the main area

1231 11th Ave · Unit 4

San Francisco CA 94122 · Kitchen

K-S7

Device schedule

Rev R8 · 2026-11-02
Status: REVIEW DRAFT — not a cut release; nothing ordered.
Supersedes: R1–R7 sheets + earlier NTS diagrams.

Notes

Proposal for Tisa to mark up. AFF = above finished floor; floor not chosen yet, so subfloor marks wait.

Owner inputs kept: 3 counter circuits, own circuits for dishwasher, disposal, fridge; hood hardwired; light switches at the entry; pendant remote at the sink.

Changed: all counter outlets 41" up; sink-wall outlets beside pie-safe; disposal on air button instead of wall switch.

NOT TO SCALE (table)

Geometry: Magicplan MASTER plan abb2d2c6 (live 11/2) + SVG export S01 cross-checked to labels ±1/16". Heights = AFF (finished floor).